

Supplementary Materials

Efficient Generation of Microdroplets Using Tail Breakup Induced with Multi-Branch Channels

Daiki Tanaka ^{1,*}, Satsuki Kajiya ², Seito Shijo ², Dong Hyun Yoon ¹, Masahiro Furuya ², Yoshito Nozaki ¹, Hiroyuki Fujita ³, Tetsushi Sekiguchi ¹ and Shuichi Shoji ²

¹ Research Organization for Nano & Life Innovation, Waseda University, 513 Wasedatsurumakicho, Shinjuku-ku, Tokyo 162-0041, Japan; yoon@shoji.comm.waseda.ac.jp (D.H.Y.); y.nozaki@aoni.waseda.jp (Y.N.); t-sekiguchi@waseda.jp (T.S.)

² Department of Electronic and Physical Systems, School of Fundamental Science and Engineering, Waseda University, 3-4-1 Okubo, Shin-juku-ku, Tokyo 145-0065, Japan; kajiya@shoji.comm.waseda.ac.jp (S.K.); shijo@shoji.comm.waseda.ac.jp (S.S.); furuya@aoni.waseda.jp (M.F.); shojis@waseda.jp (S.S.)

³ Canon Medical Systems Corporation, 1385 Shimoishigami, Otawara-shi, Tochigi 324-8550, Japan; hiroyuki12.fujita@medical.canon

* Correspondence: d.tanaka@ruri.waseda.jp; Tel.: +81-3-3204-5765

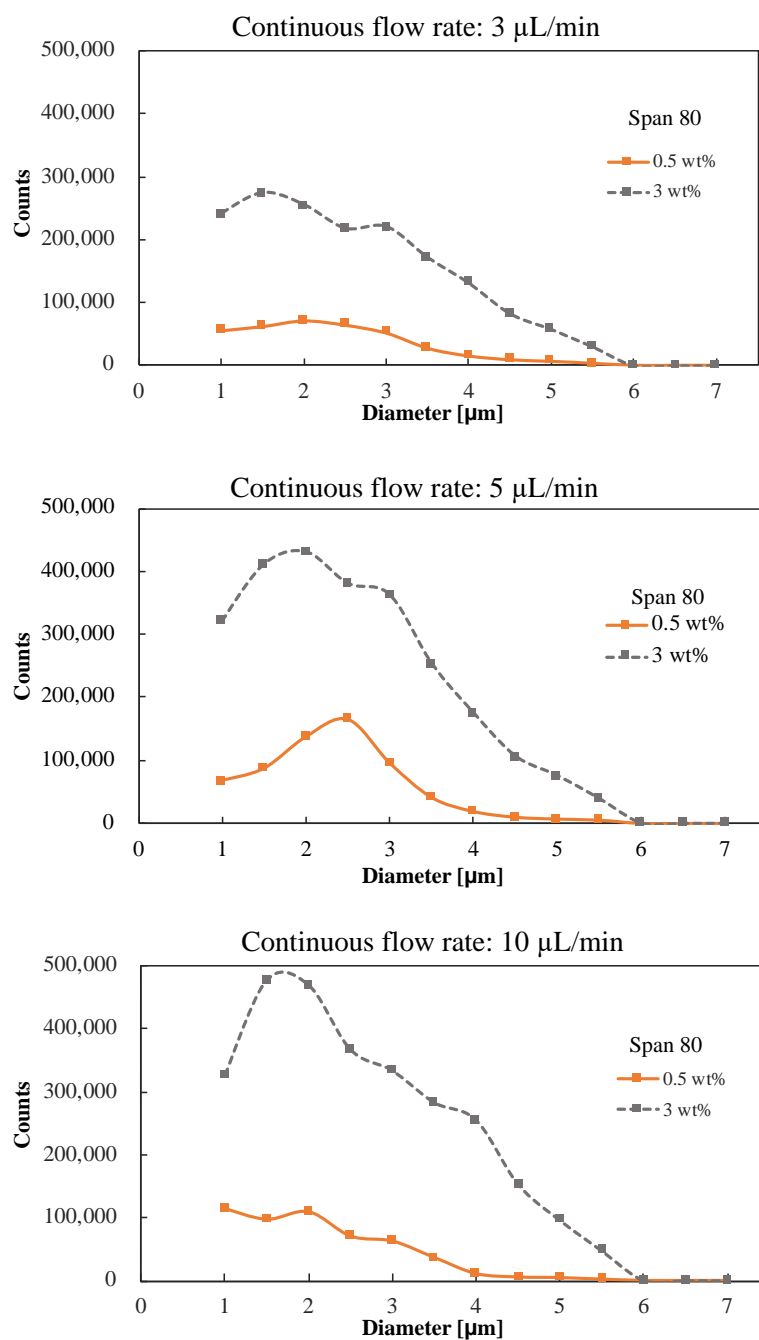


Figure S1. Varying the concentration of surfactant in the continuous flow.