

Enhanced Acetone Sensing Properties Based on Au-Pd Decorated ZnO Nanorod Gas Sensor

Yinfeng Shen ¹, Yiping Liu ¹, Chao Fan ², Qudong Wang ³, Ming Li ¹, Zhi Yang ^{2,*} and Liming Gao ^{1,*}

1 State Key Laboratory of Metal Matrix Composites, School of Material Science and Engineering, Shanghai Jiao Tong University, Shanghai 200240, China

2 Key Laboratory of Thin Film and Microfabrication (Ministry of Education), Department of Micro/Nano Electronics, School of Electronic Information and Electrical Engineering, Shanghai Jiao Tong University, Shanghai 200240, China

3 National Engineering Research Center of Light Alloy Net Forming, State Key Laboratory of Metal Matrix Composites, School of Materials Science and Engineering, Shanghai Jiao Tong University, Shanghai 200240, China

* Correspondence: zhiyang@sjtu.edu.cn (Z.Y.); liming.gao@sjtu.edu.cn (L.G.)

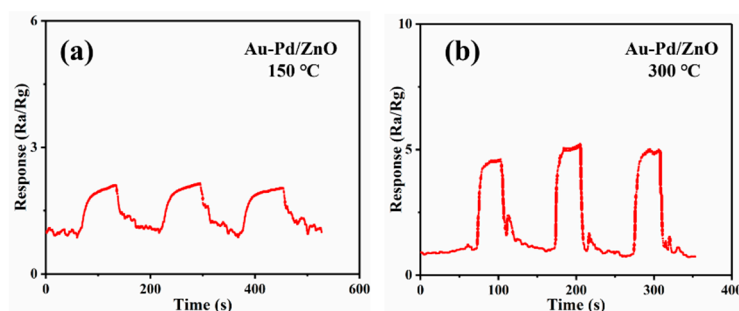


Figure S1 Repeatability of Au-Pd/ZnO to 50 ppm acetone.