

Supplementary Materials

Sound Insulation and Reflection Properties of Sonic Crystal Barrier Based on Micro-Perforated Cylinders

Stefan M. Dimitrijević ^{1,2}, Víctor M. García-Chocano ³, Francisco Cervera ³, Emelie Roth ¹ and José Sánchez-Dehesa ^{3,*}







¹ Structor Akustik AB, Solnavägen 4, 113 65 Stockholm, Sweden

² School of Electrical Engineering, University of Belgrade, Bulevar K. Aleksandra 73, 11000 Belgrade, Serbia

³ Department of Electronic Engineering, Universitat Politècnica de València, Camino de Vera s/n, ES-46022 Valencia, Spain

* Correspondence: jsdehesa@upv.es; Tel.: +34-63-0353-603

Received: 30 June 2019; Accepted: 27 August 2019; Published: date

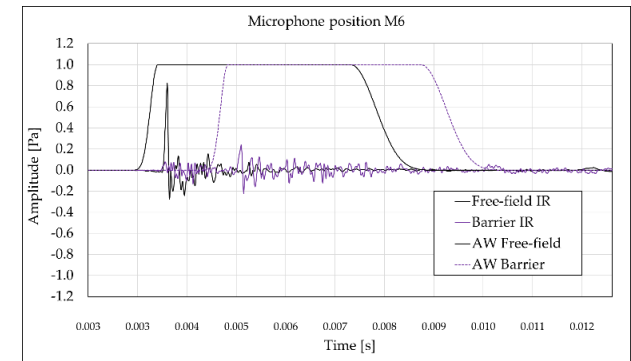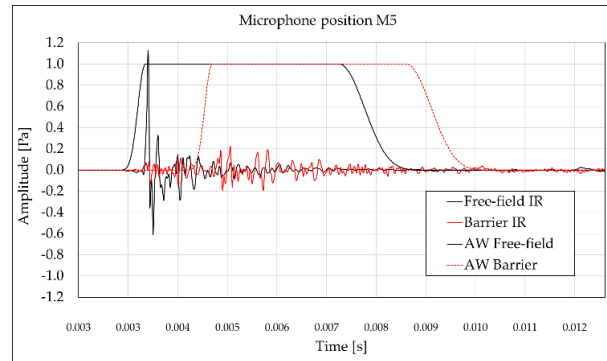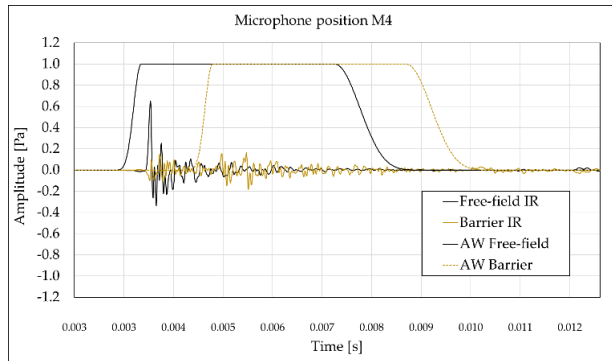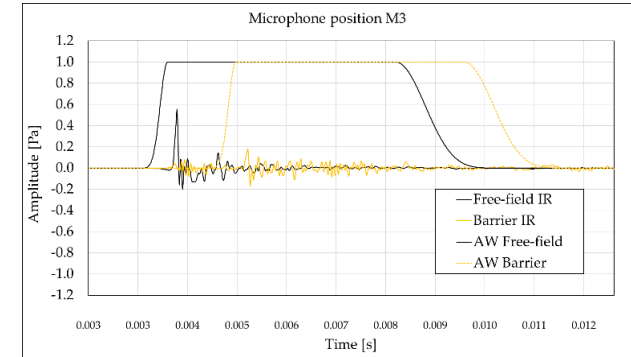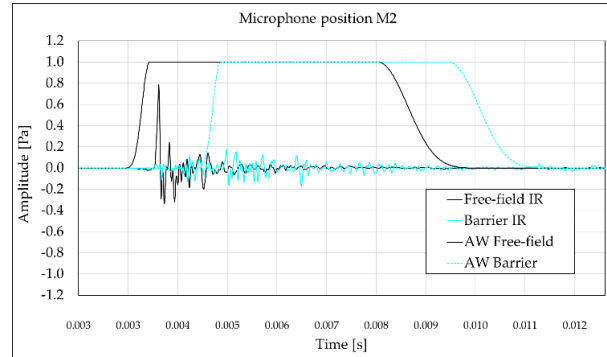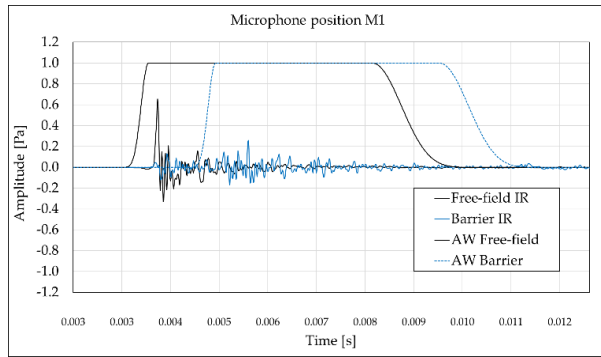

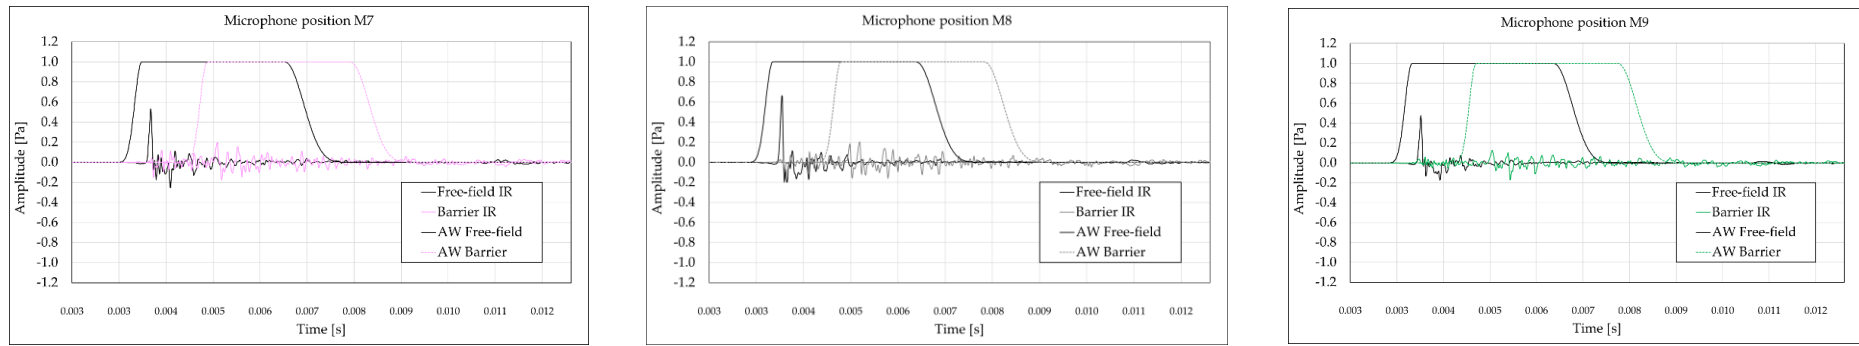


Figure S1. Impulse responses at individual microphone positions M1 – M9 for standardised EN 1793–5 measurement of sound reflection index RI in configuration A.

0

1



© 2019 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).