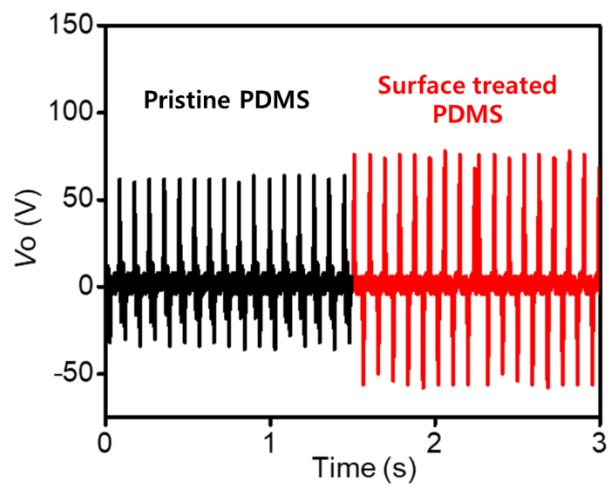


# Facile Tailoring of Contact Layer Characteristics of the Triboelectric Nanogenerator Based on Portable Imprinting Device



**Figure S1.** Output voltages generated from the TENG with the pristine PDMS contact layer and the ozone treated PDMS contact layer.