

Article

Methodological Aspects of Obtaining and Characterizing Composites Based on Biogenic Diatomaceous silica and Epoxy Resins

Marta Dobrosielska ¹, Renata Dobrucka ^{1,2,*}, Dariusz Brząkański ³, Michał Gloc ¹, Janusz Rębiś ¹, Julia Głowacka ⁴, Krzysztof J. Kurzydłowski ^{1,5} and Robert E. Przekop ^{4,*}

¹ Faculty of Materials Science and Engineering, Warsaw University of Technology, ul. Wołoska 141, 02-507 Warsaw, Poland; Marta.Dobrosielska@pw.edu.pl (M.D.); michal.gloc@pw.edu.pl (M.G.); janusz.rebis@pw.edu.pl (J.R.); krzysztof.kurzydowski@pw.edu.pl (K.J.K.)

² Department of Non-Food Products Quality and Packaging Development, Institute of Quality Science, Poznań University of Economics and Business, al. Niepodległości 10, 61-875 Poznań, Poland

³ Faculty of Chemistry, Adam Mickiewicz University in Poznań, 8 Uniwersytetu Poznańskiego, 61-614 Poznań, Poland; d.brzakalski@gmail.com

⁴ Centre for Advanced Technologies, Adam Mickiewicz University in Poznań, ul. Uniwersytetu Poznańskiego 10, 61-614 Poznań, Poland; julia.glowacka@amu.edu.pl

⁵ Faculty of Mechanical Engineering, Białystok University of Technology, Wiejska 45c, 15-351 Białystok, Poland

* Correspondence: Renata.Dobrucka@pw.edu.pl (R.D.); r.przekop@gmail.com, rprzekop@amu.edu.pl (R.E.P.)



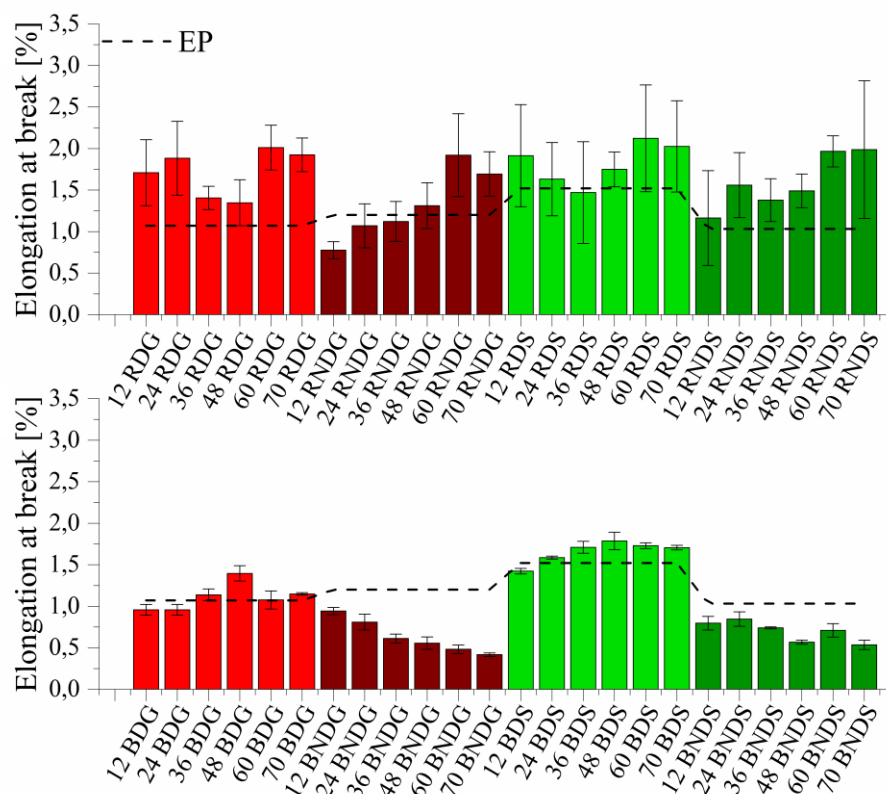


Figure S1. Elongation at break for degassed and non-degassed composites containing base diatoms and rinsed diatom.

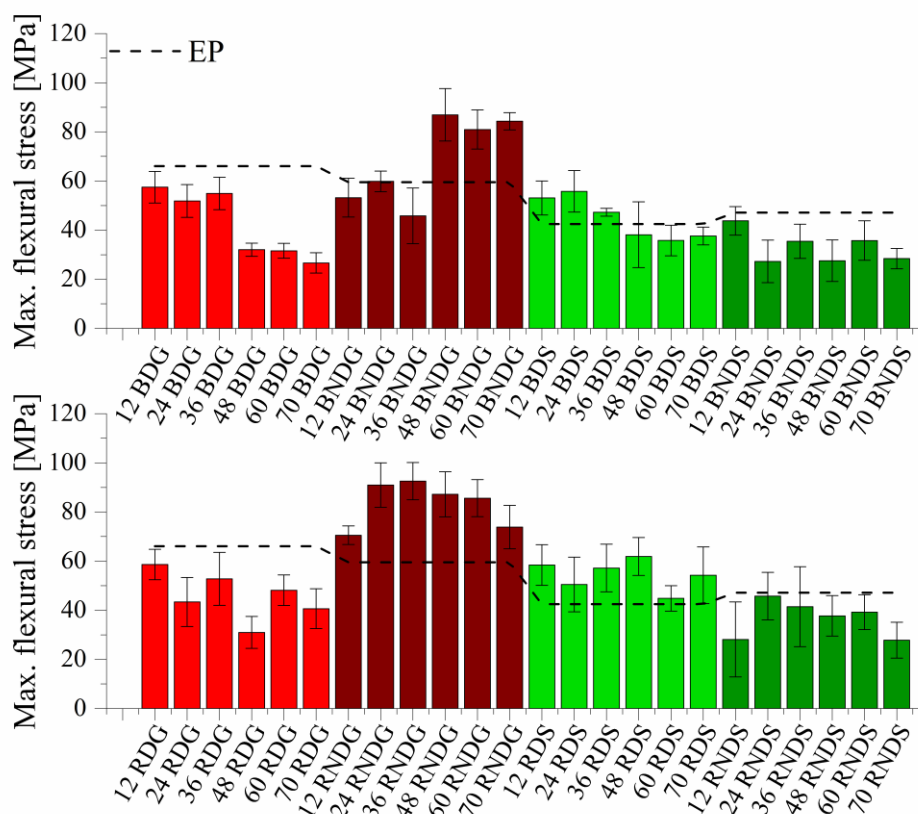

(A)

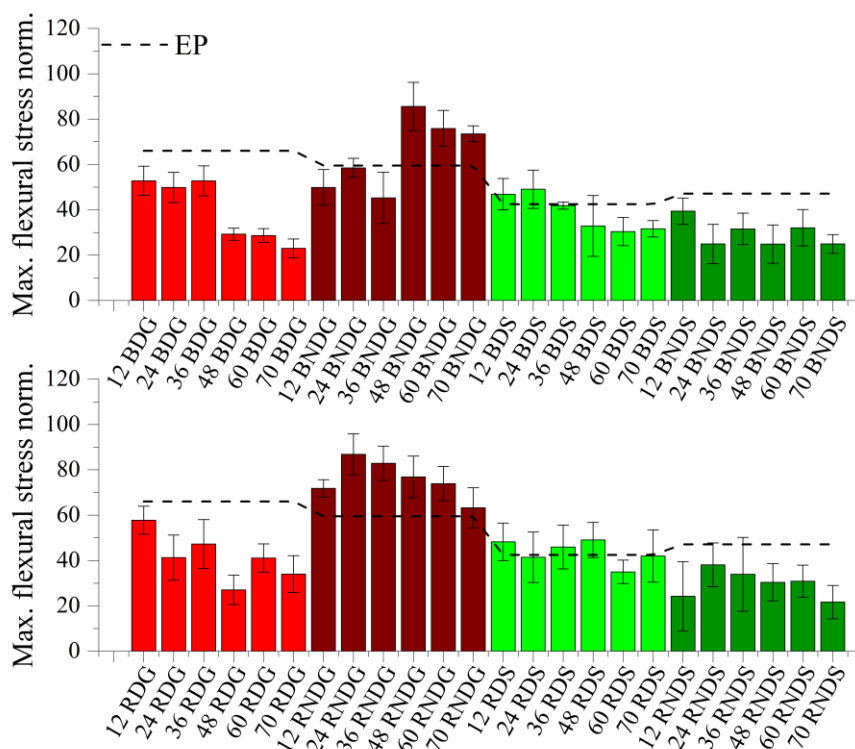

(B)

Figure S2. (A) Flexural stress for degassed and non-degassed composites containing base diatoms and rinsed diatoms; (B) Flexural stress for degassed and non-degassed composites containing base diatoms and rinsed diatoms, density normalized.

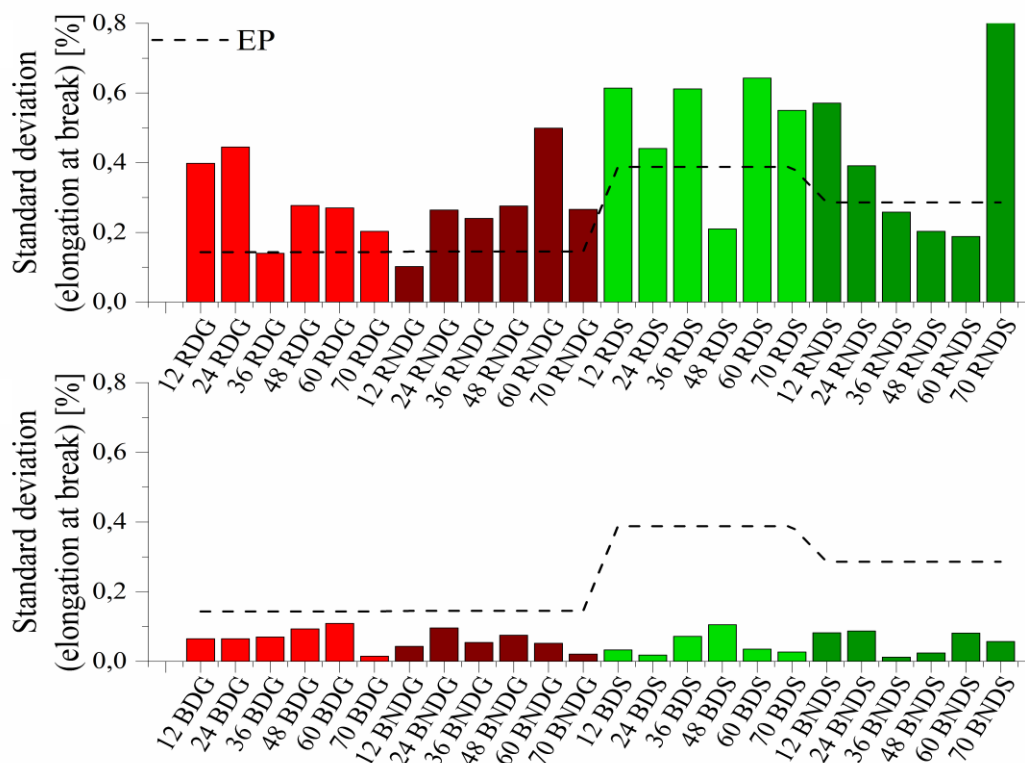


Figure S3. Standard deviation at the maximum elongation for degassed and non-degassed composites containing base diatoms and rinsed diatoms.

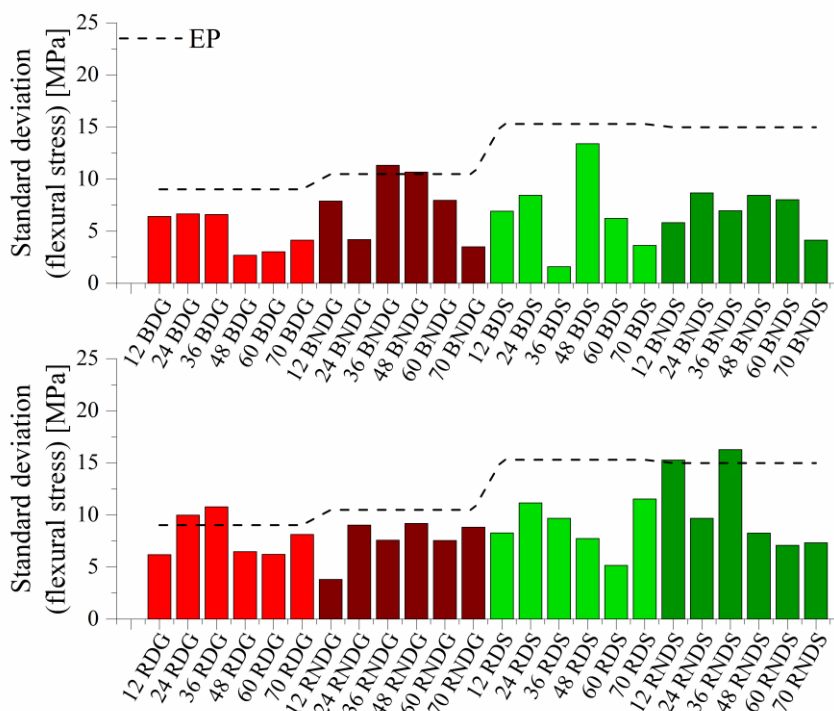


Figure S4. Standard deviation at the flexural stress for degassed and non-degassed composites containing base diatoms and rinsed diatoms.

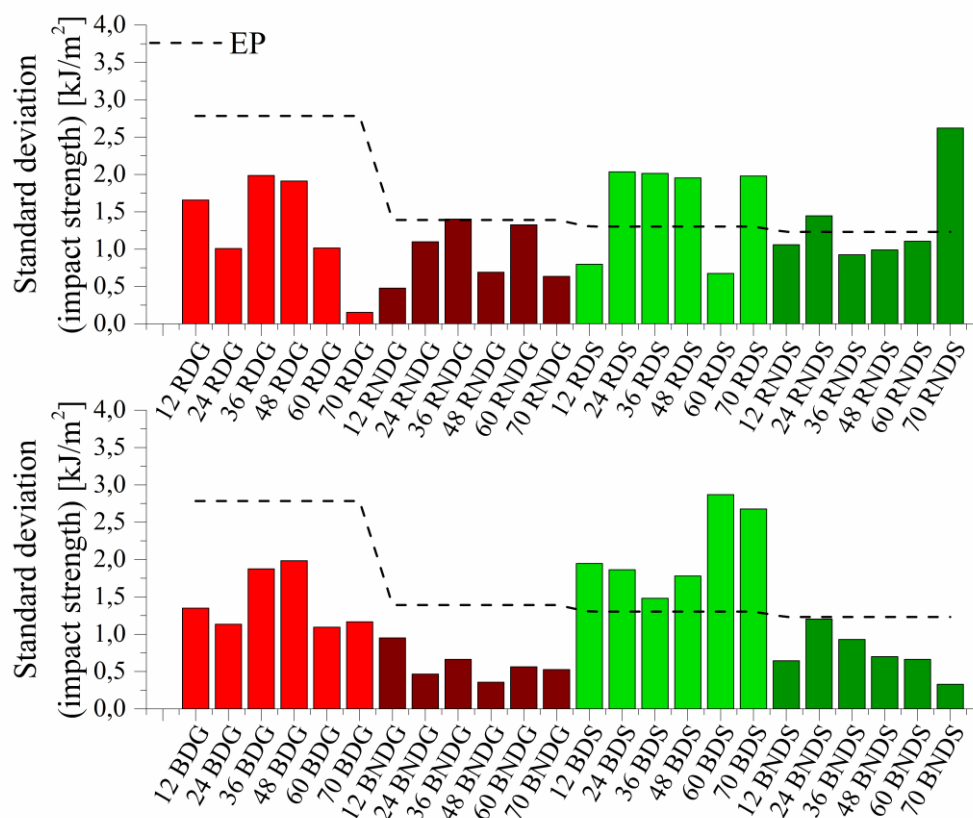


Figure S5. Standard deviation at the impact strength for degassed and non-degassed composites containing base diatoms and rinsed diatoms.