

Supplementary Materials

# Performance of Nanocomposites of a Phase Change Material Formed by the Dispersion of MWCNT/TiO<sub>2</sub> for Thermal Energy Storage Applications



Maha AlOtaibi <sup>1</sup>, Mohammed Alsuhbani <sup>1,\*</sup>, Maha Khayyat <sup>1</sup> and Bandar AlOtaibi <sup>2,3</sup>

<sup>1</sup> King Abdul Aziz City for Science and Technology, Riyadh 11442, Saudi Arabia; mralotaibi@kacst.edu.sa (M.A.); mkhayyat@kacst.edu.sa (M.K.)

<sup>2</sup> The Center of Excellence for Advanced Materials and Manufacturing, King Abdulaziz City for Science and Technology, Riyadh 11442, Saudi Arabia; bmalotaibi@kacst.edu.sa

<sup>3</sup> The National Center for Energy Storage Technology, King Abdulaziz City for Science and Technology, Riyadh 11442, Saudi Arabia

\* Correspondence: sohybani@kacst.edu.sa

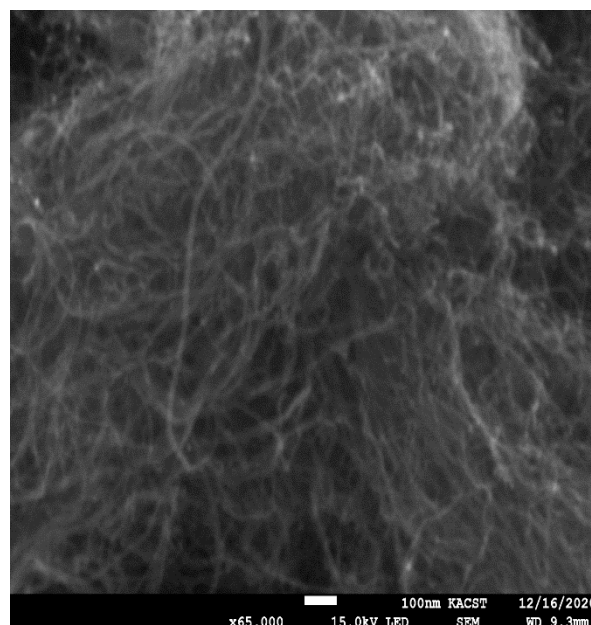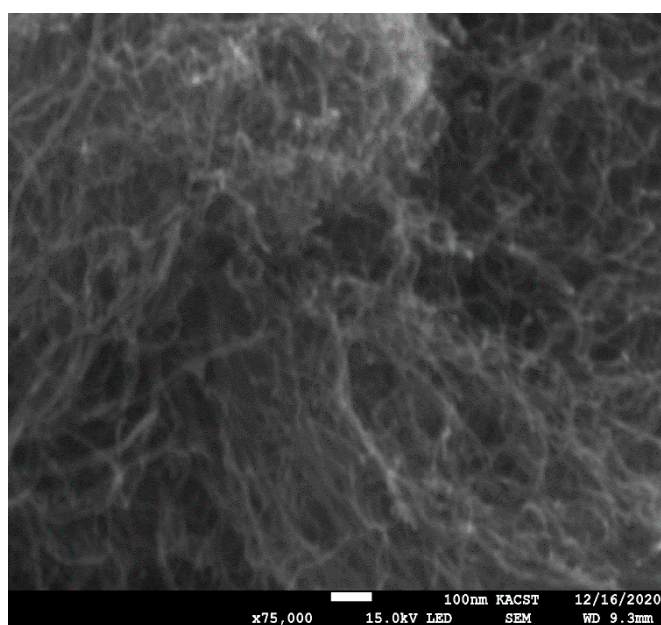

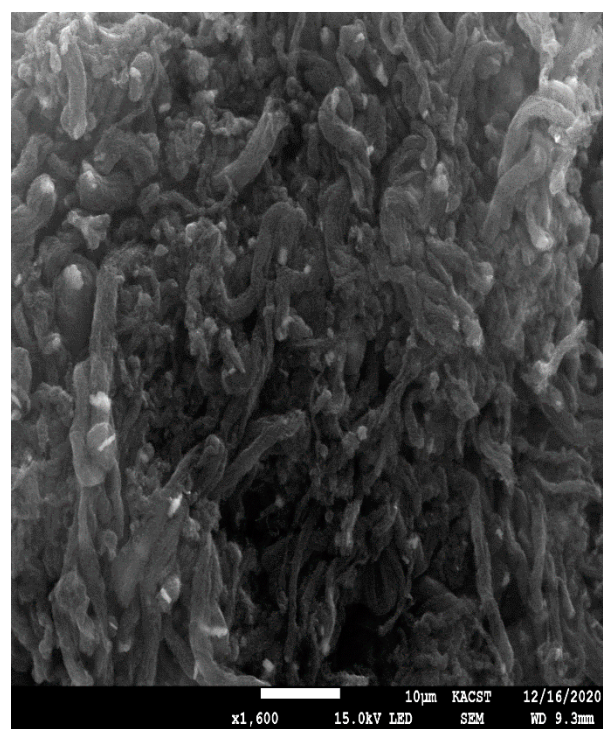
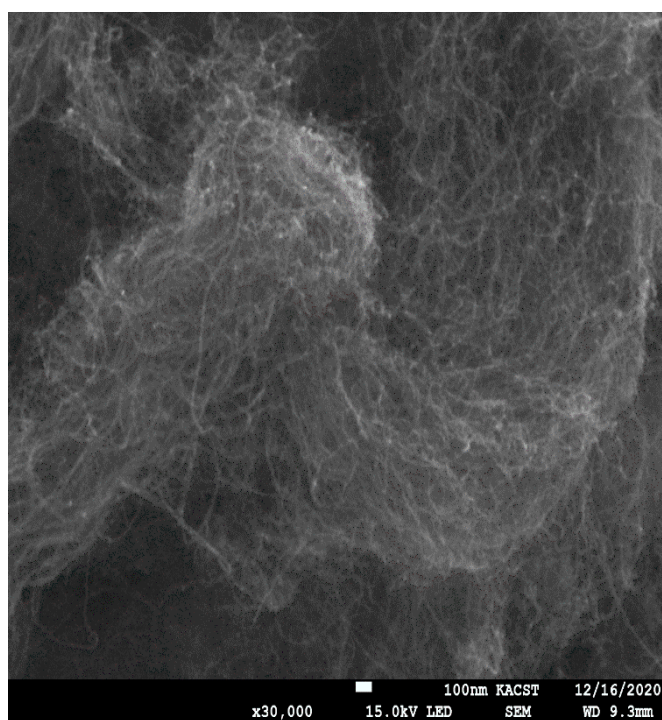


Figure S1. SEM of MWCNT.

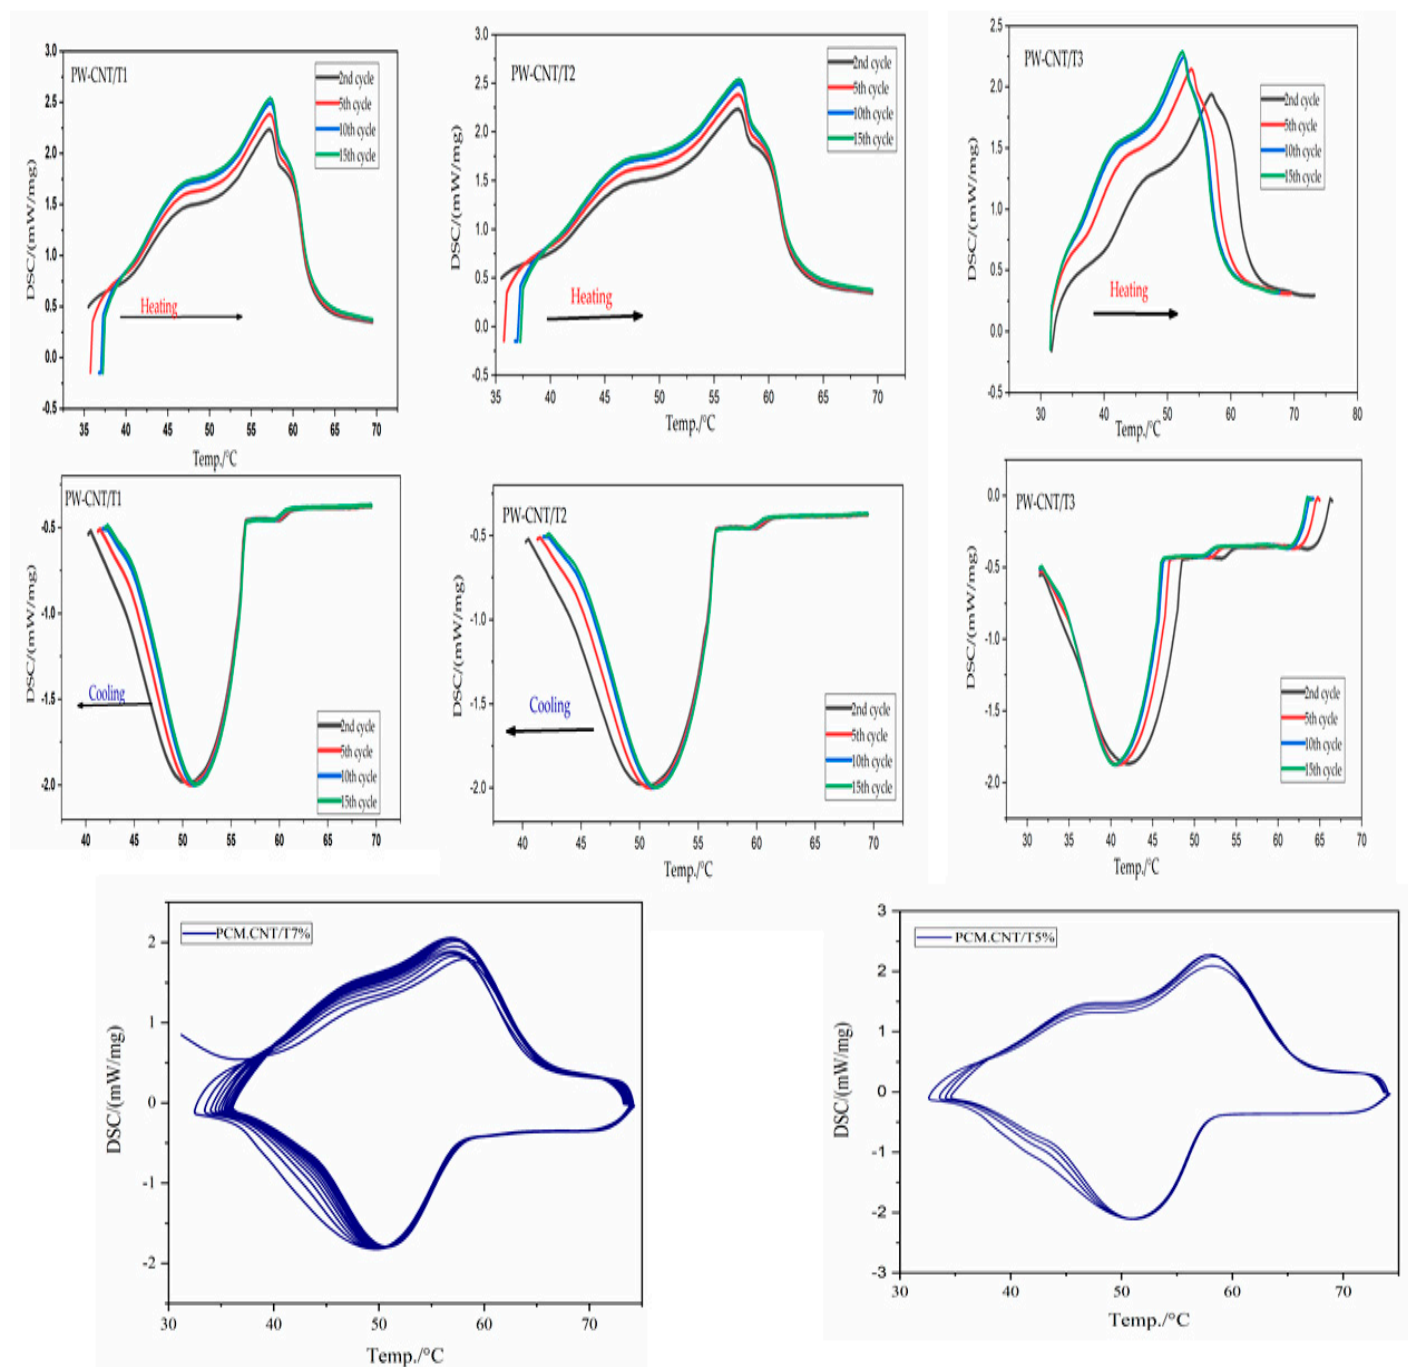


Figure S2. 1) DSC curve of PCM composites; 2) recycling of PCM composites.