

Supplementary Materials: Reduced Graphene Oxide Based Radio Frequency Glucose Sensing Device Using Multi-Dimensional Parameters

Byeongho Park, Hyung Goo Park, Jae-hoon Ji, Jinsoo Cho and Seong Chan Jun

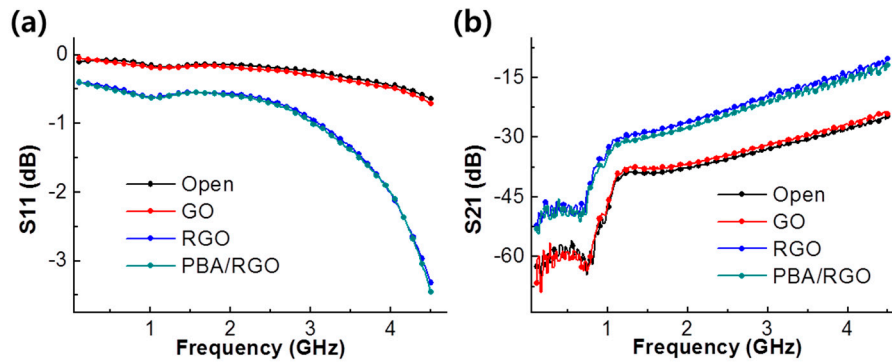


Figure S1. S-parameter results, (a) S11; (b) S21, of several electrodes with open without interconnector, GO, RGO, PBA/RGO.