

Supporting Information

Efficient Broadband Truncated-Pyramid-Based Metamaterial Absorber in the Visible and Near-Infrared Regions

Phuc Toan Dang ¹, Tuan V. Vu ^{2,3}, Jongyoon Kim ¹, Jimin Park ¹, Van-Chuc Nguyen ¹, Dat D. Vo ^{2,3},
Truong Khang Nguyen ^{2,3}, Khai Q. Le ^{2,3,*} and Ji-Hoon Lee ^{1,*}

¹ Future Semiconductor Convergence Technology Research Center, Division of Electronics Engineering, Jeonbuk National University, Jeonju 54896, Korea

² Division of Computational Physics, Institute for Computational Science, Ton Duc Thang University, Ho Chi Minh City 700000, Vietnam

³ Faculty of Electrical & Electronics Engineering, Ton Duc Thang University, Ho Chi Minh City 700000, Vietnam

* Correspondence: lequangkhai@tdtu.edu.vn (K.Q.L.); jihoonlee@jbnu.ac.kr (J.-H.L.)

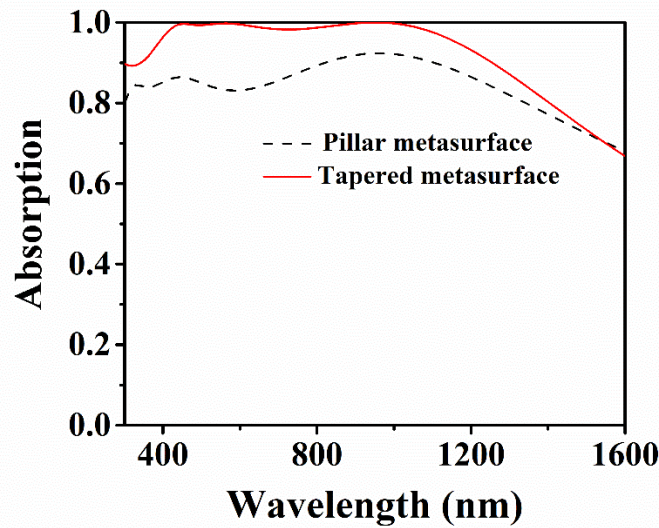


Figure S1. The absorption performances of pillars (cylinder) and truncated pyramids with normally incident TE-polarized light. The height and radius of pillar are 140 and 70 nm, respectively.