

Supporting information

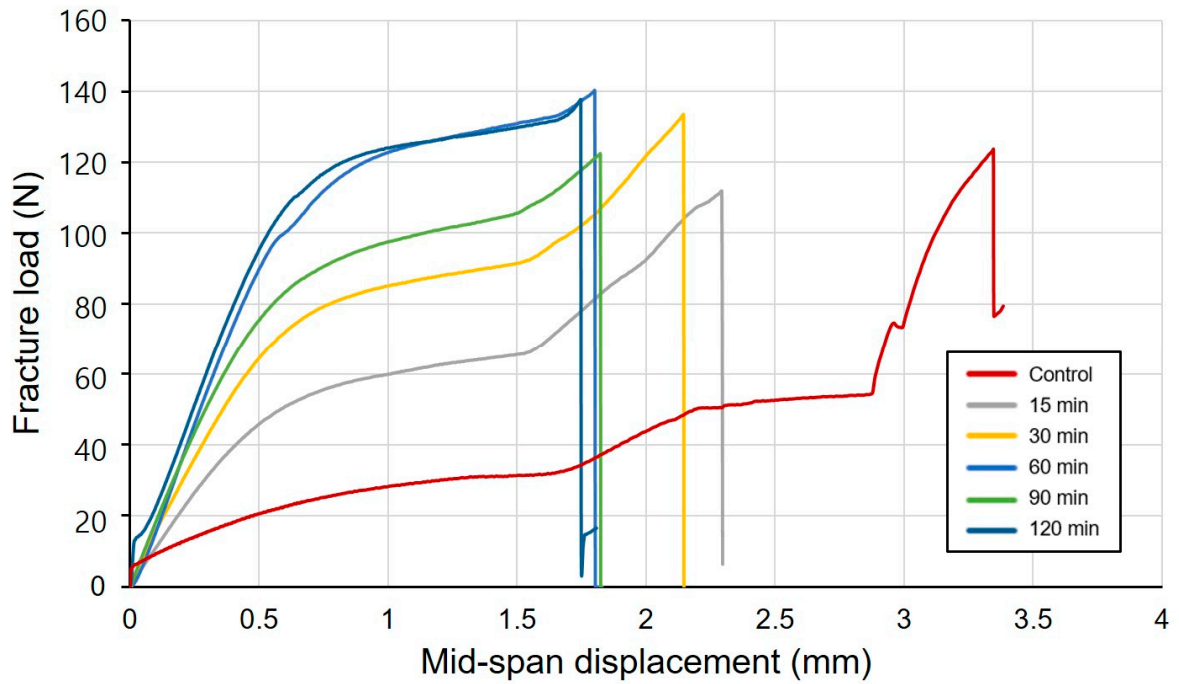


Figure S1. Representative curves of fracture load of the 3D printing resin (DIONavi C&B) used in this study. It can be observed that the fracture load continues to increase as the post-curing time increases, and the shorter the post-curing time, the greater the displacement.