

# An all-solid-state lithium-metal battery based on electrodes-compatible plastic crystal electrolyte working at ambient temperature

Bin Zhao <sup>1, ‡</sup>, Boheng Yuan <sup>1, ‡</sup>, Zhi Cong <sup>1</sup>, Zhi Cheng <sup>1</sup>, Qi Wang <sup>1</sup>, Yafei Lu <sup>1</sup> and Xiaogang Han <sup>1, 2, \*</sup>

<sup>1</sup> State Key Laboratory of Electrical Insulation and Power Equipment, School of Electrical Engineering, Xi'an Jiaotong University, Xi'an, Shaanxi 710049, China

<sup>2</sup> Key Laboratory of Smart Grid of Shanxi Province, Xi'an, Shaanxi 710049, China

<sup>‡</sup> Bin Zhao and Boheng Yuan contributed equally to this work

<sup>\*</sup> Correspondence: xiaogang.han@xjtu.edu.cn



Figure S1. Photograph of PI film.

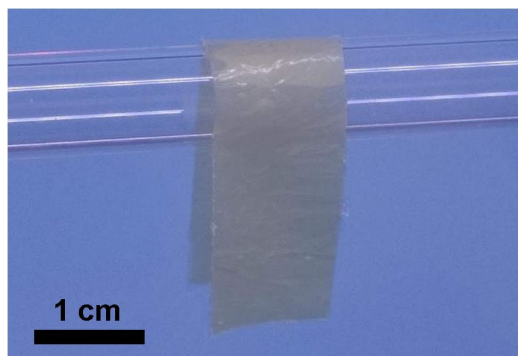


Figure S2. Photograph of PI-CPE film.

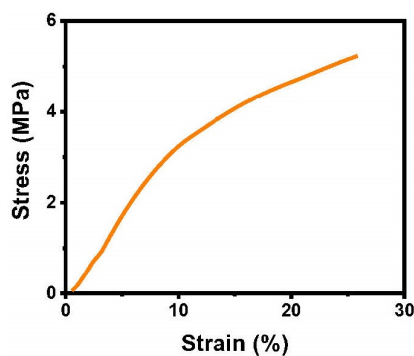


Figure S3. Strain–stress curves of PI-CPE film.

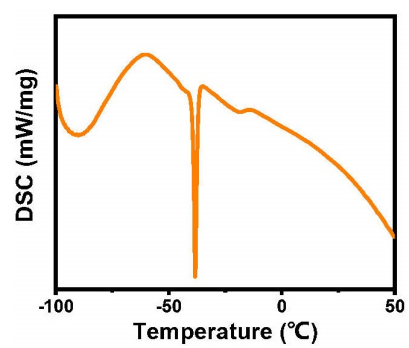


Figure S4. DSC curve of PI-CPE.