

Cooperative Effect of Ni-Decorated Monolayer WS₂, NiO, and AC on Improving the Flame Retardancy and Mechanical Property of Polypropylene Blends

Mingqiang Shao ^{1,*}, Yiran Shi ¹, Jiangtao Liu ¹, Baoxia Xue ¹ and Mei Niu ^{1,*}

¹ College of Textile Engineering, Taiyuan University of Technology, Taiyuan 030024, China;

* Correspondence: shaomingqiang@tyut.edu.cn (M.S.); niumei@tyut.edu.cn (M.N.)

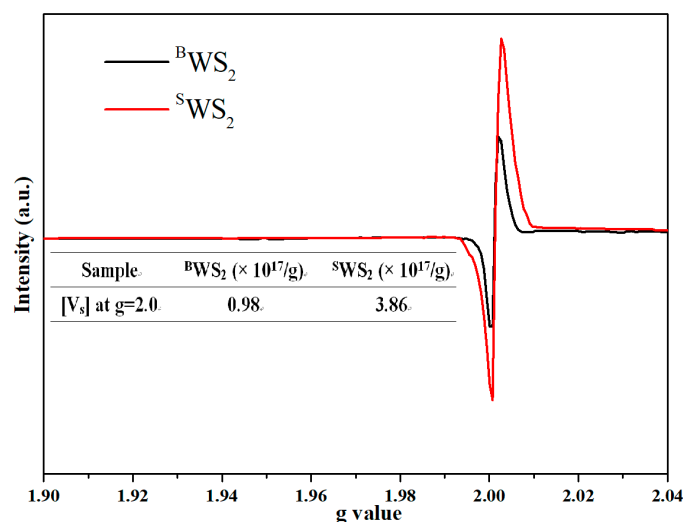


Figure S1. EPR spectra of bulk WS₂ (^BWS₂), and single layer WS₂ (^SWS₂), and the number of sulfur vacancies.

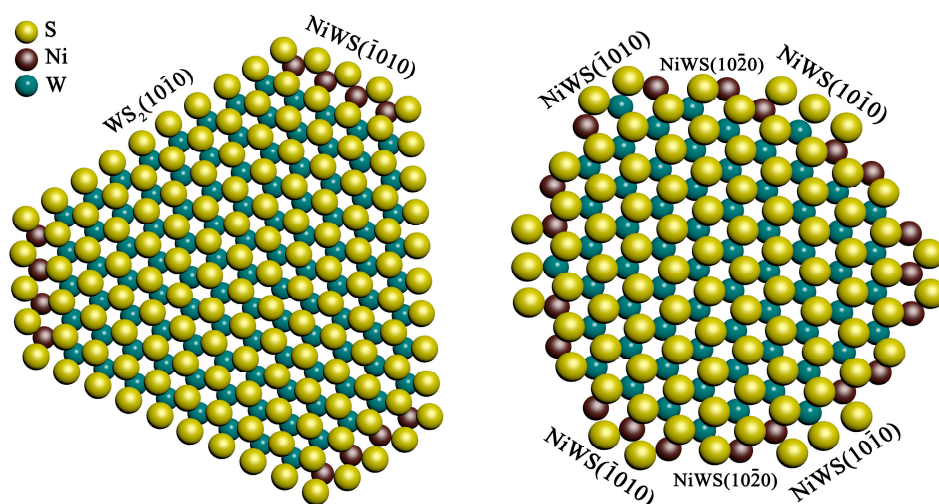


Figure S2. Scheme of typical Ni-W-S model.