

Thermoelectric properties of one-pot hydrothermally synthesized solution-processable PEDOT:PSS/MWCNTs composite materials

Haibin Li ¹, Shanxiang Han ¹, Ruibai Luo ^{2,4,*}, Jingbo Hu ^{2,4}, Bin Du ^{2,3}, Kenan Yang ¹, Shisheng Zhou ^{2,3,*}, Yizhi Bao ², Junjie Jia ² and Xuemei Zhang ²

¹ School of Mechanical and Precision Instrument Engineering, Xi'an University of Technology, Xi'an 710048, China; lhbzwt@163.com (H.L.); 1200210002@stu.xaut.edu.cn (K.Y.).

² Faculty of Printing, Packaging Engineering and Digital Media Technology, Xi'an University of Technology, Xi'an 710048, China; s.x.han@stu.xaut.edu.cn (S.H.); baoyizhi0424@163.com (Y.B.); 13429762525@163.com (J.J.); 17791496292@163.com (X.Z.).

³ Shaanxi Provincial Key Laboratory of printing and Packaging Engineering, Xi'an University of Technology, Xi'an 710048, China; dubin@xaut.edu.cn (B.D.).

⁴ Shanxi Key Laboratory of Advanced Manufacturing Technology, North University of China, Taiyuan 038507, China; hujingboxaut@163.com (J.H.).

* Correspondence: zhoushisheng@xaut.edu.cn (S.Z.); lorubai@xut.edu.cn (R.L.)

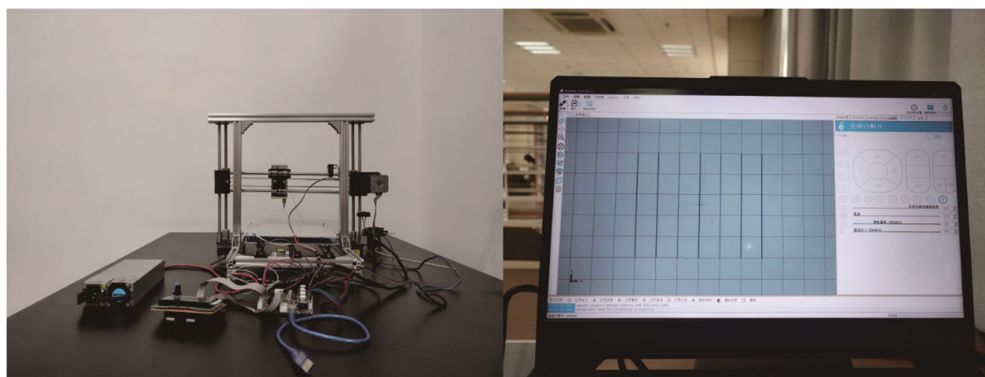


Figure S1. Photos of a self-made 3D printing extrusion system and Repetier Host application interface.