

# Water-processed mesoscale structure enables 18.5% efficient binary layer-by-layer organic solar cells

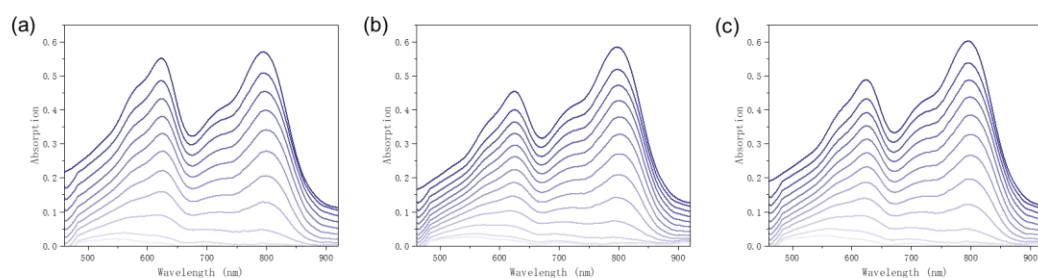


Figure S1. FLAS of (a) BC, (b) LBL and (c) meso-LBL processed PM6:L8-BO films.

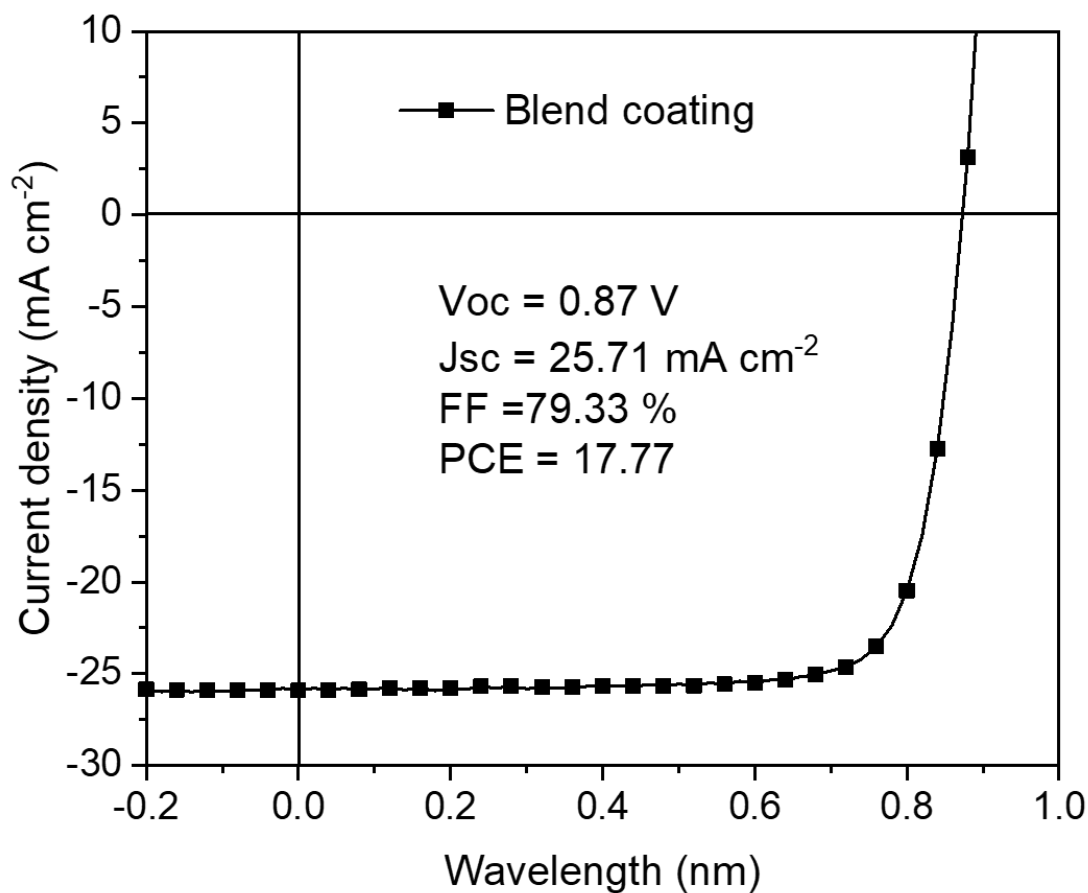


Figure S2. J-V characteristics of blend coating PM6:L8-BO solar cells.

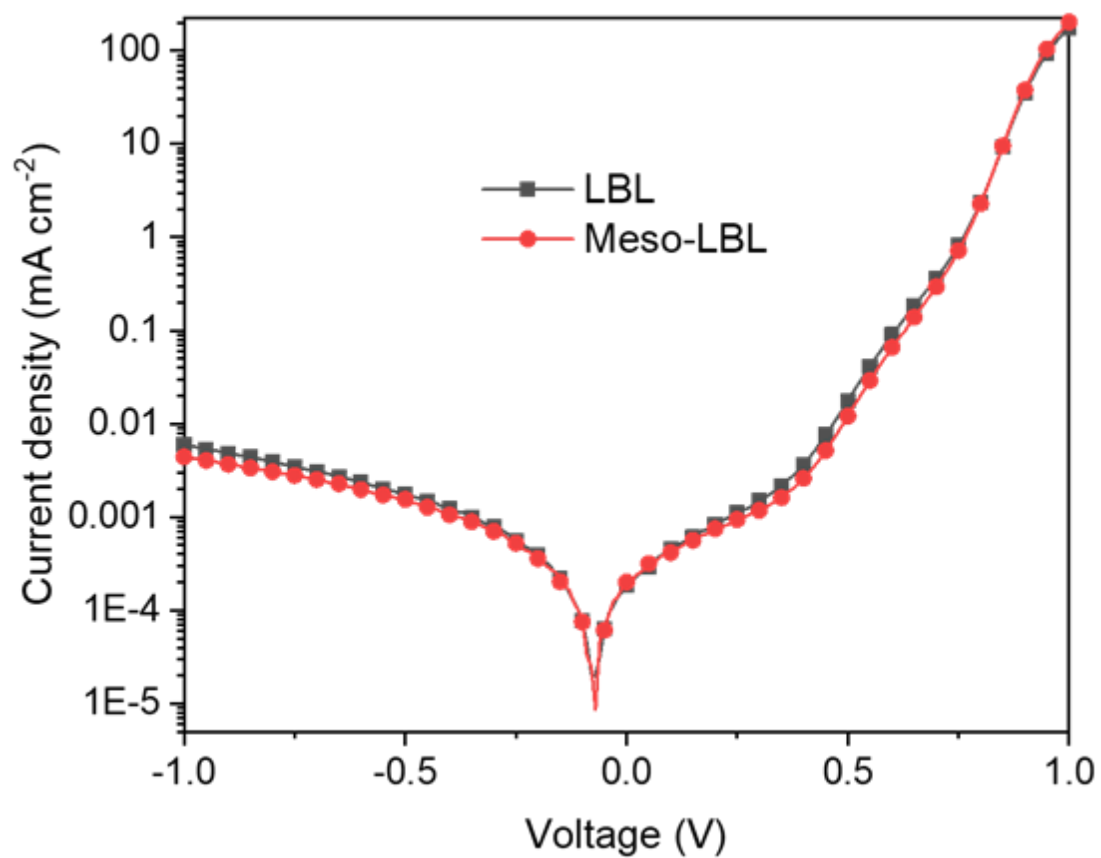


Figure S3. Dark J–V characteristics of PM6/L8-BO conventional LBL and meso-LBL solar cells.