

Supplementary materials

Forecast of AMD Quantity by a Series Tank Model in Three Stages: Case Studies in Two Closed Japanese Mines

Chiharu Tokoro ^{1,*}, Kenichiro Fukaki ², Masakazu Kadokura ² and Shigeshi Fuchida ¹

¹ Faculty of Science and Engineering, Waseda University, 3-4-1 Okubo, Shinjuku-ku, Tokyo 169-8555, Japan; sfuchida@aoni.waseda.jp

² Graduate School of Creative Science and Engineering, Waseda University, 3-4-1 Okubo, Shinjuku-ku, Tokyo 169-8555, Japan; kf-2219-rikoh@ruri.waseda.jp (K.F.); masa-kado0413@akane.waseda.jp (M.K.)

* Correspondence: tokoro@waseda.jp; Tel.: +81-3-5286-3320

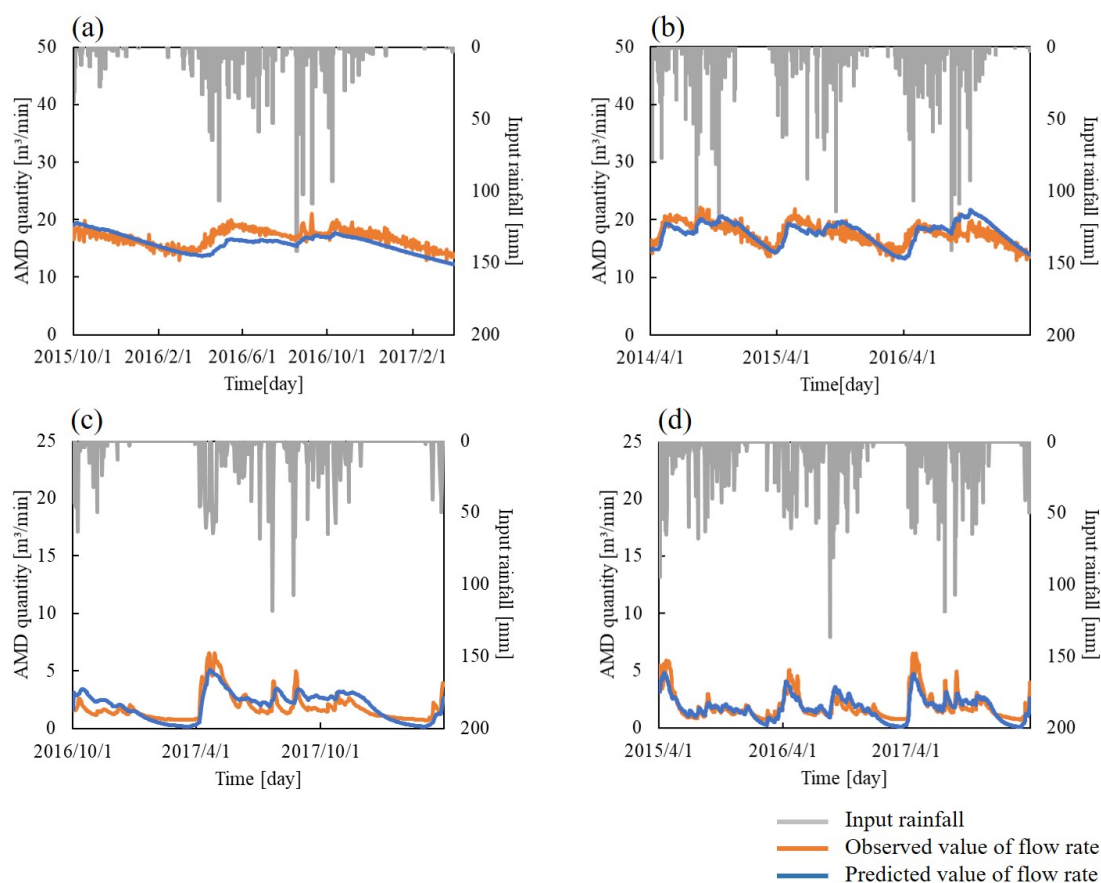


Figure S1. Observed and calculated AMD quantity by the tank model for (a) Mine A with half-year fitting, (b) Mine A with two-year fitting, (c) Mine B with half-year fitting, and (d) Mine B with two-year fitting.

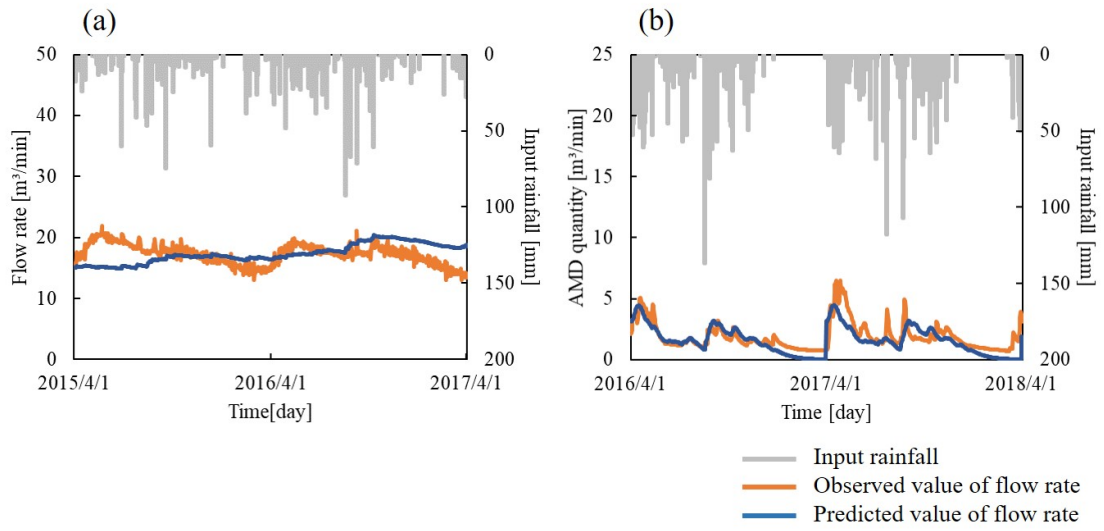


Figure S2. Observed and calculated AMD quantity by the tank model without correction of rainfall and temperature or considering snowmelt for (a) Mine A and (b) Mine B.