

Supporting Information

Effect of h-BN and nano-SiO₂ fillers on the high-temperature tribological properties of PEEK/PI-based composites

Mengjiao Li ¹, Jingjing Yang ², Shengqi Ma ³, Gang Liu ¹, Hongru Yang ¹, and Jianan Yao ^{1,*}

¹ Shanghai High-Performance Fibers and Composites Center (Province-Ministry Joint), Center for Civil Aviation Composites, Donghua University, Shanghai 201620, China

² Tianma Microelectronics Co., Ltd., Shanghai 200120, China

³ Institute of Shandong Non-Metallic Materials, Jinan 250031, China

Submitted to

Lubricants

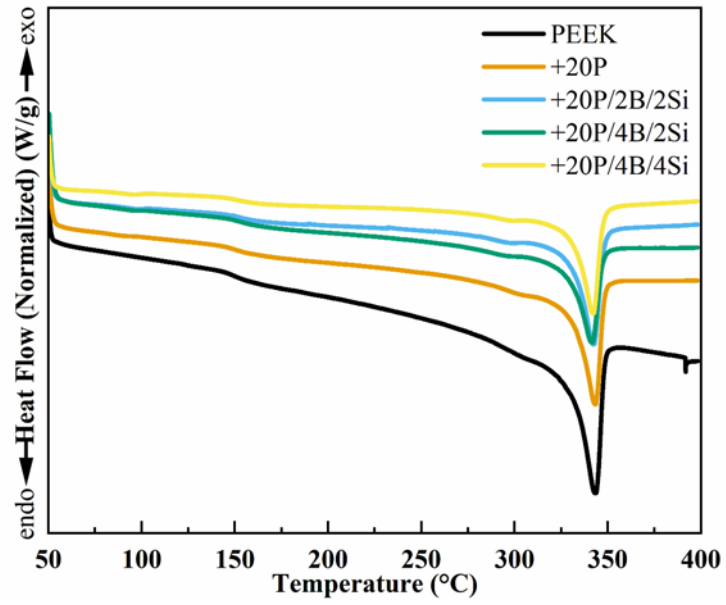


Figure S1. Differential Scanning Calorimetry (DSC) scans of PEEK-based composites.

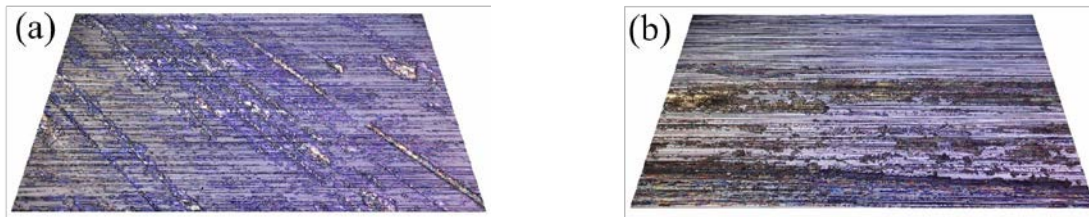


Figure S2. 3D Microscope images of TFLs on steel disk after wear test of +20P/2B/2Si at (a) room temperature and (b) 200 °C.