

Article

# High-Energy Ball Milling and Spark Plasma Sintering of the CoCrFeNiAl High-Entropy Alloy


Alexander S. Rogachev <sup>1,2,\*</sup>, Nicholas A. Kochetov <sup>1</sup>, Anna V. Panteleeva <sup>2</sup>, Kirill V. Kuskov <sup>2</sup>, Dmitry Yu. Kovalev <sup>1</sup>, Alexander S. Shchukin <sup>1</sup>, Sergey G. Vadchenko <sup>1</sup> and Yury B. Scheck <sup>1</sup>

<sup>1</sup> Merzhanov Institute of Structural Macrokinetics and Materials Science, Russian Academy of Sciences, Chernogolovka, Moscow 142432, Russia; kolyan\_kochetov@mail.ru (N.A.K.); kovalev@ism.ac.ru (D.Y.K.); shchukin@ism.ac.ru (A.S.S.); vadchenko@ism.ac.ru (S.G.V.); ybsch@mail.ru (Y.B.S.)


<sup>2</sup> Center of Functional Nanoceramics, National University of Science and Technology MISiS, Moscow 119049, Russia; pant\_ania\_97@mail.ru (A.V.P.); kkuskov@isis.ru (K.V.K.)

\* Correspondence: rogachev@ism.ac.ru; Tel.: +7-905-708-0648

Received: 10 October 2020; Accepted: 05 November 2020; Published: 8 November 2020

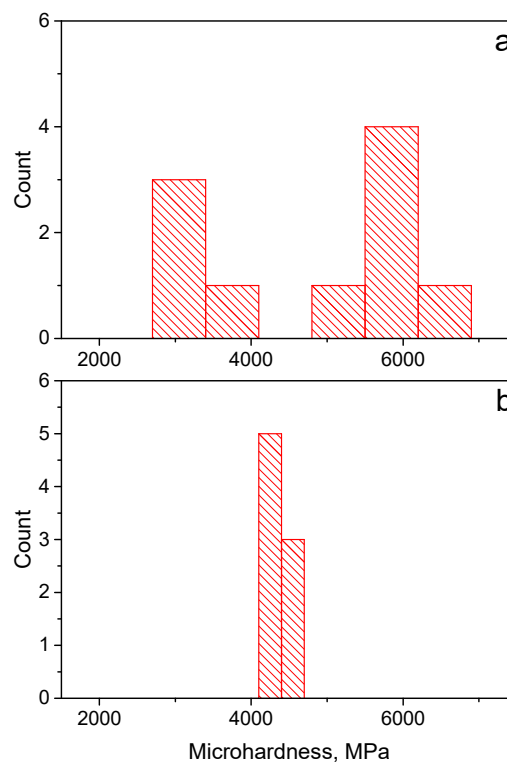

**Figure S1.** Distributions of microhardness measured in different randomly chosen points of the SPS-consolidated samples: SPS at 800 °C (a) and SPS at 1000 °C (b).

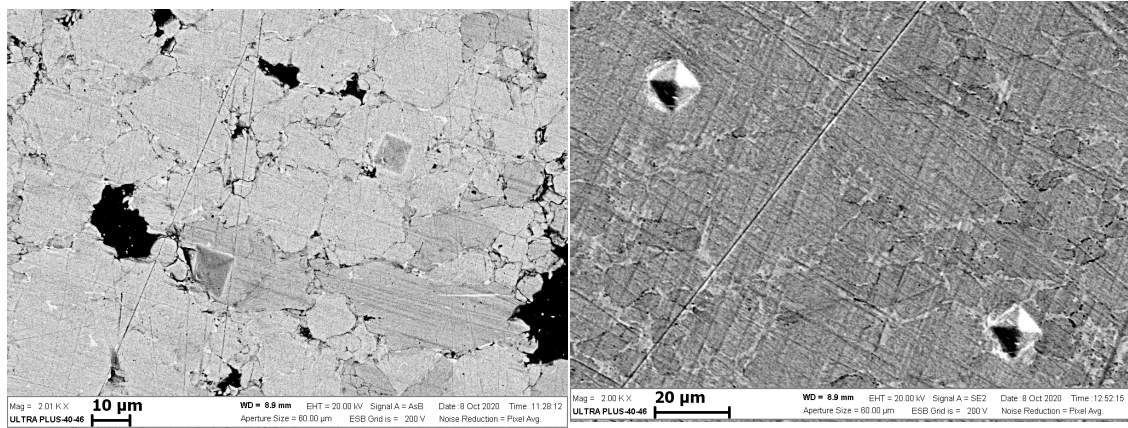

(a)

(b)

Figure S2. Microhardness prints in the samples sintered at 800 °C (a) and 1000 °C (b).