

Supplementary File

Dielectric studies of Bi₂MoO₆/Graphene oxide and La-doped Bi₂MoO₆/Graphene oxide Nanocomposites

Syed Farooq Adil ^{1,*}, Shoomaila Latif ², Muhammad Waqar ³, Muhammad Imran ^{3,*}, Sadia Noreen ³,
Mujeeb Khan ¹, Mohammed Rafi Shaik ¹ and Mohammad Rafe Hatshan ¹

¹ Department of Chemistry, College of Science, King Saud University, P.O. 2455, Riyadh 11451,

Saudi Arabia; kmujeeb@ksu.edu.sa (M.K.); mrshaik@ksu.edu.sa (M.R.S.); mhatshan@ksu.edu.sa (M.R.H.)

² School of Physical Sciences, University of the Punjab, Lahore-54590, Pakistan; shoomaila.sps@pu.edu.pk (S.L.)

³ Institute of Chemistry, University of the Punjab, Lahore-54590, Pakistan; waqar0100@gmail.com (M.W.); sadian543@gmail.com (S.N.)

* Correspondence: sfadil@ksu.edu.sa (S.F.A.); imran.hons@pu.edu.pk (M.I.); Tel.: +966-11-4670439 (S.F.A.)

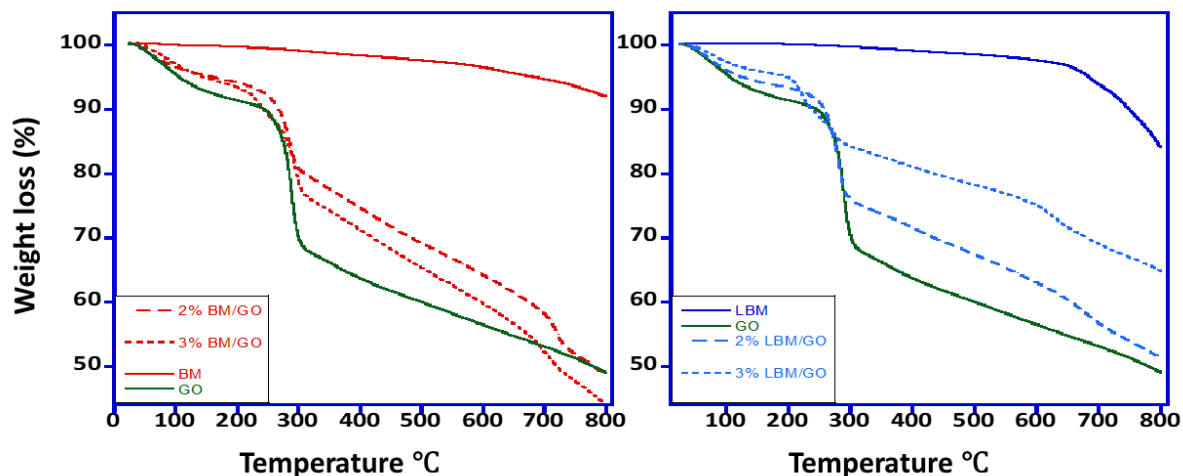


Figure S1: Comparative thermal degradation patterns of (a) BM, LM, GO, 2% BM/GO 3% BM/GO, 2% LBM/GO, and 3% BM/GO