

Assessment of manufacturing parameters for Arrangement of new 3D-printed heating circuits based on CNT-doped nanocomposites processed by UV-Assisted Direct Write - Supporting information

A. Cortés*, A. Jiménez-Suárez*, M. Campo, A. Ureña and S. G. Prolongo

Materials Science and Engineering Area, Escuela Superior de Ciencias Experimentales y Tecnología, Universidad Rey Juan Carlos, Calle Tulipán s/n, 28933 Móstoles (Madrid), Spain.

* Corresponding authors: alberto.jimenez.suarez@urjc.es, tel: +34914887141; alejandro.cortes@urjc.es; tel: +34914888252.

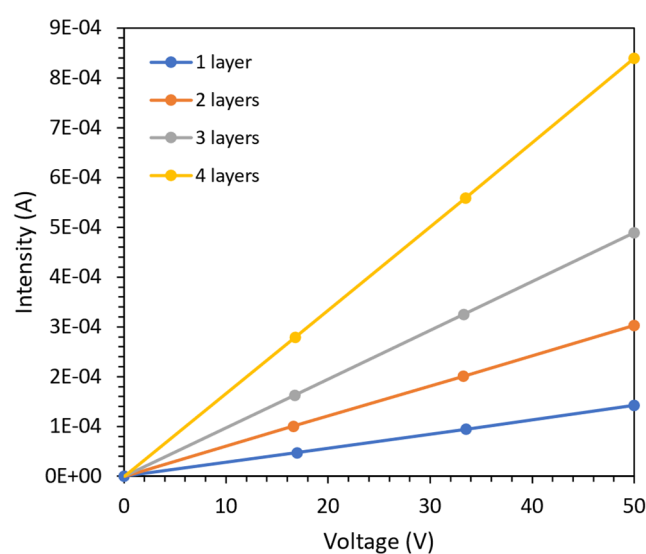


Figure S1. Voltage-Intensity measurements as a function of the number of printed layers.