

Article

Optimization of a MOF Blended with Modified Polyimide Membrane for High-Performance Gas Separation

Yushu Zhang ¹, Hongge Jia ^{1,*}, Qingji Wang ², Wenqiang Ma ¹, Guoxing Yang ³, Shuangping Xu ^{1,*}, Shaobin Li ¹, Guiming Su ⁴, Yanqing Qu ¹, Mingyu Zhang ¹ and Pengfei Jiang ¹

¹ Heilongjiang Provinces Key Laboratory of Polymeric Composite Materials, Department of Chemical and Chemical Engineering, Qiqihar University, Wenhua Street, Qiqihar, Heilongjiang Province 161006, China; 18204667530@163.com (Y.Z.); mfeather7@163.com (W.M.); qqhrslb1022@126.com (S.L.); vipquyanqing@163.com (Y.Q.); zhangmingyuno1@163.com (M.Z.); jpf848185@163.com (P.J.)

² CNPC Research Institute of Safety & Environment Technology, Changping District, Beijing 102249, China; wangqingji@petroChina.com.CN

³ Synthetic Resin Laboratory Daqing Petrochemical Research Center, Petrochemical Research Institute, No. 2, Chengxiang Road, Wolitun, Longfeng District, Daqing 163714, China; ygx459@petrochina.com.cn

⁴ Institute of Advanced Technology, Heilongjiang Academy of Sciences, No. 52, Renhe Street, Nangang District, Harbin 150009, China; suguim@163.com

* Correspondence: jiahongge@qqhru.edu.cn (H.J.); xshp_1979_1999@163.com (S.X.)

Supplementary Materials

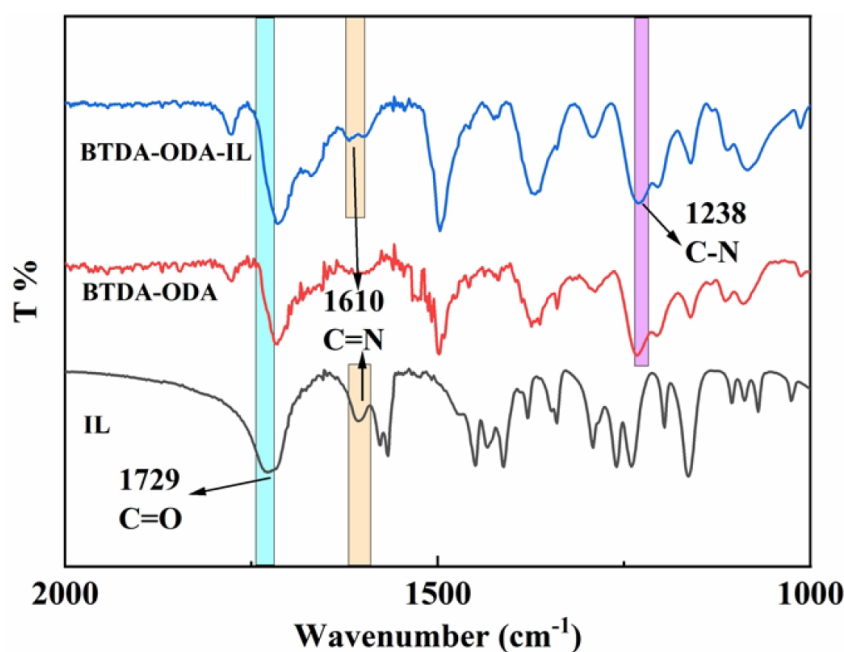


Figure S1. FT-IR spectrum of IL, PI, PI-IL. .

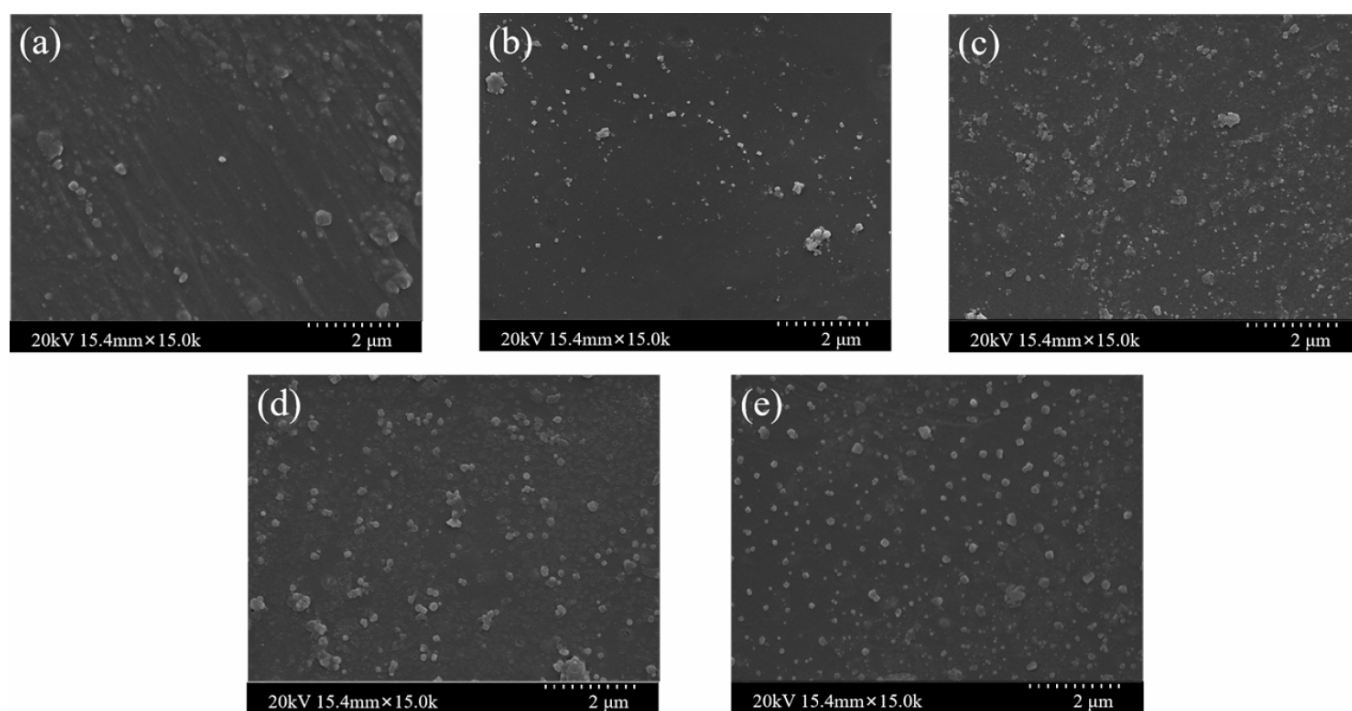


Figure S2. The surface topography of PI-IL/1%-5%MOF MMMs (a-e).