

Supplemental File

Electrochemical Behaviour of Ti/Al₂O₃/Ni Nanocomposite Material in Artificial Physiological Solution: Prospects for Biomedical Application

Alla Vorobjova ¹, Daria Tishkevich ^{2,3,*}, Dmitriy Shimanovich ¹, Maxim Zdorovets ^{4,5,6}, Artem Kozlovskiy ⁴, Tatiana Zubar ^{2,3}, Denis Vinnik ³, Mengge Dong ⁷, Sergey Trukhanov ^{2,3}, Alex Trukhanov ^{2,3} and Valery Fedosyuk ²

¹ Department of Micro- and Nanoelectronics, Belarusian State University of Informatics and Radioelectronics, 220013 Minsk, Belarus; vorobjova@bsuir.by (A.V.); shdl@tut.by (D.S.)

² Laboratory of Magnetic Films Physics, Scientific-Practical Materials Research Centre of National Academy of Sciences of Belarus, 220072 Minsk, Belarus; fix.tatyana@gmail.com (T.Z.); sv_truhanov@mail.ru (S.T.); truhanov86@mail.ru (A.T.); fedosyuk@physics.by (V.F.)

³ Laboratory of Single Crystal Growth, South Ural State University, 454080 Chelyabinsk, Russia; denisvinnik@gmail.com

⁴ The Institute of Nuclear Physics, Almaty 050032, Kazakhstan; artem88sddt@mail.ru (A.K.); mzdorovets@gmail.com (M.Z.)

⁵ L.N. Gumilyov Eurasian National University, Nur-Sultan 010008, Kazakhstan

⁶ Ural Federal University named after the First President of Russia B.N. Yeltsin, 620075 Yekaterinburg, Russia

⁷ Department of Resource and Environment, Northeastern University, Shenyang 110819, China; mg_dong@163.com

* Correspondence: dashachushkova@gmail.com; Tel: +375-2956-28187

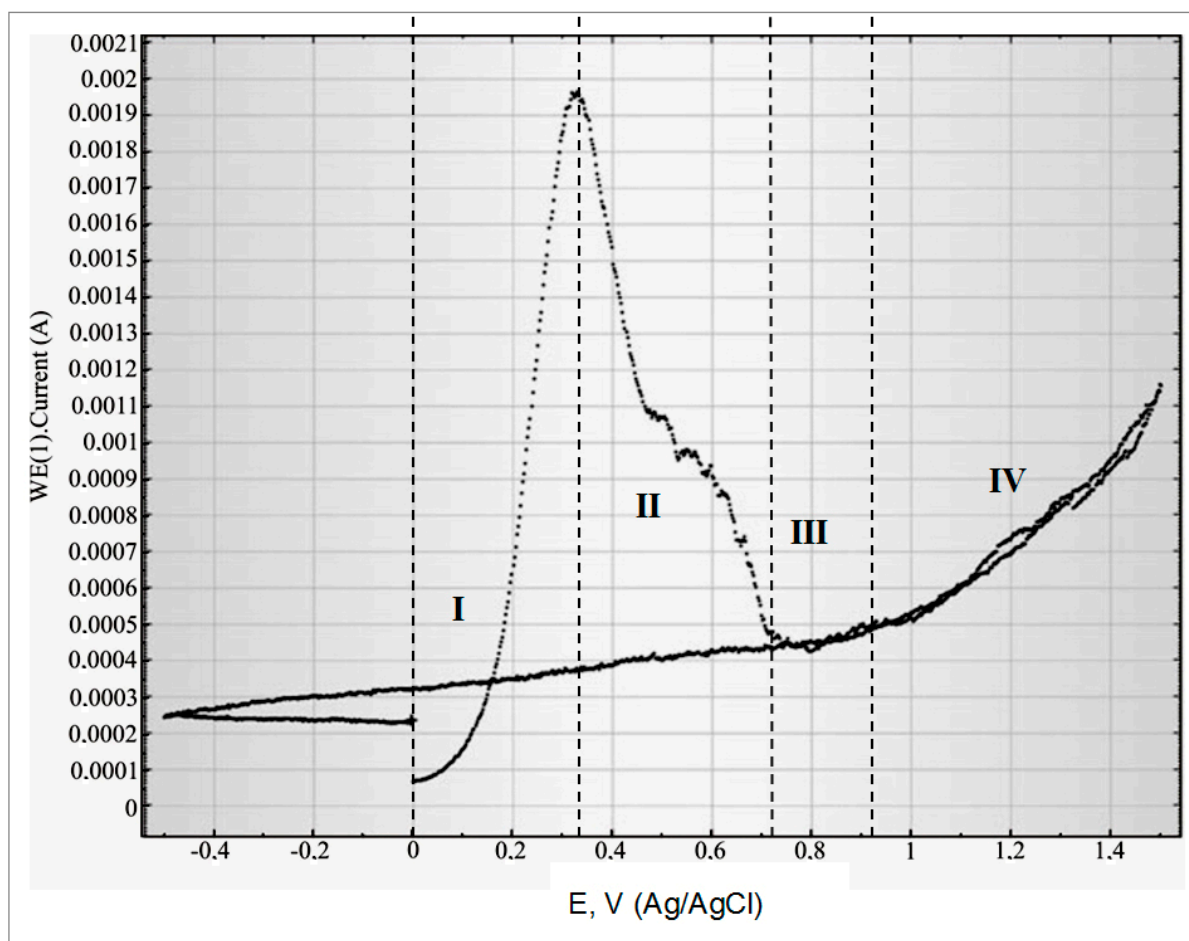


Figure S1. Cyclic voltammogram of the Ti/Al₂O₃/Ni sample in the 0.9% aqueous solution of NaCl at a potential scanning rate of 0.1 V/s after annealing at 500 °C for 30 min (the third full cycle).