

Organic microcavity laser amplifier integrated on the end facet of an optical fiber

Meng Wang¹, Zhuangzhuang Xu¹, Yaqi Ren¹, Xiaolei Bai¹ and Xinping Zhang^{2,*}

¹ School of Physical Science and Technology, Inner Mongolia University, Hohhot, Inner Mongolia 010021, China 1; wangmeng@imu.edu.cn (M.W.); xuzhuangzhuang@mail.imu.edu.cn (Z.X.); renyaqi@mail.imu.edu.cn (Y.R.); baixiaolei@imu.edu.cn (X.B.)

² School of Physics and Optoelectronic Engineering, Beijing University of Technology, Beijing 100124, China 2;

* Correspondence: zhangxinping@bjut.edu.cn (X.Z.)

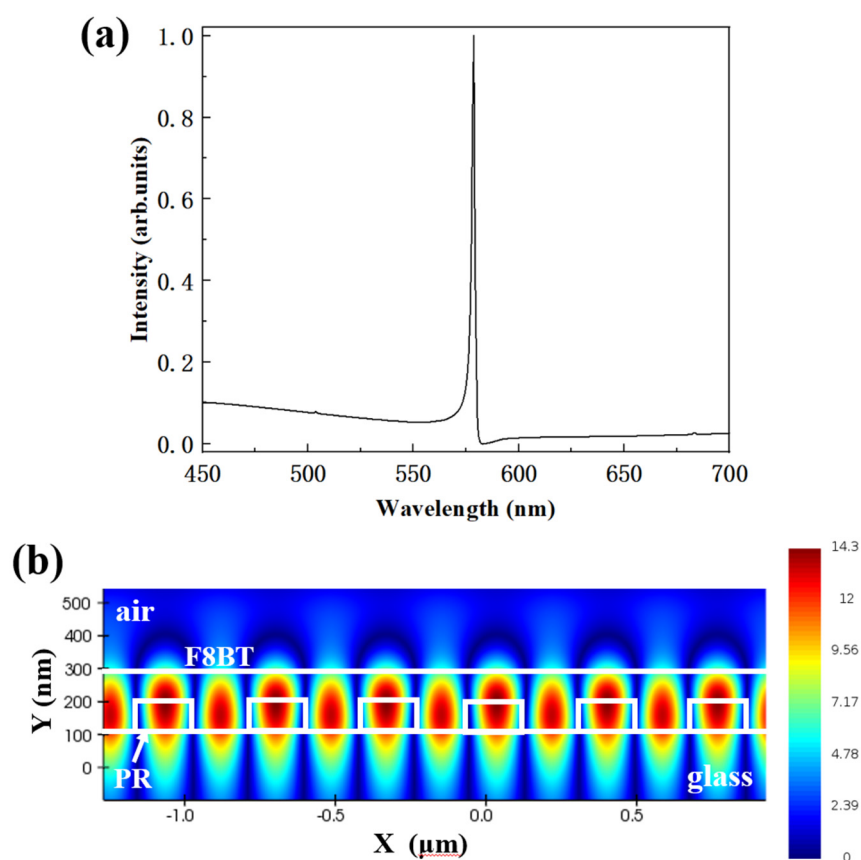


Figure S1 (a) The normalized absorption spectrum and (b) the electric fields distribution of resonant wavelength of the DFB microcavities calculated by FDTD Solutions.