

Supporting Information

Optoelectronic and Electrothermal Properties of Transparent Conductive Silver Nanowires Films

Yuehui Wang^{1,*}, Dexi Du^{1,2}, Xing Yang^{1,2}, Xianfeng Zhang^{1,*} and Yuzhen Zhao³

¹ Zhongshan Institute, University of Electronic Science and Technology of China, Zhongshan 528402, China; dudexi_work@foxmail.com (D.D.); shirleywyh@126.com (X.Y.)

² School of Materials and Energy, University of Electronic Science and Technology of China, Chengdu 610054, China

³ Department of Materials Science and Engineering, Tsinghua University, Beijing 100084, China; zhaoyz@mail.tsinghua.edu.cn

* Correspondence: wangzsedu@126.com (Y.W.); zhangxf07@gmail.com (X.Z.); Tel.: +86-760-8832-5402 (Y.W. & X.Z.)

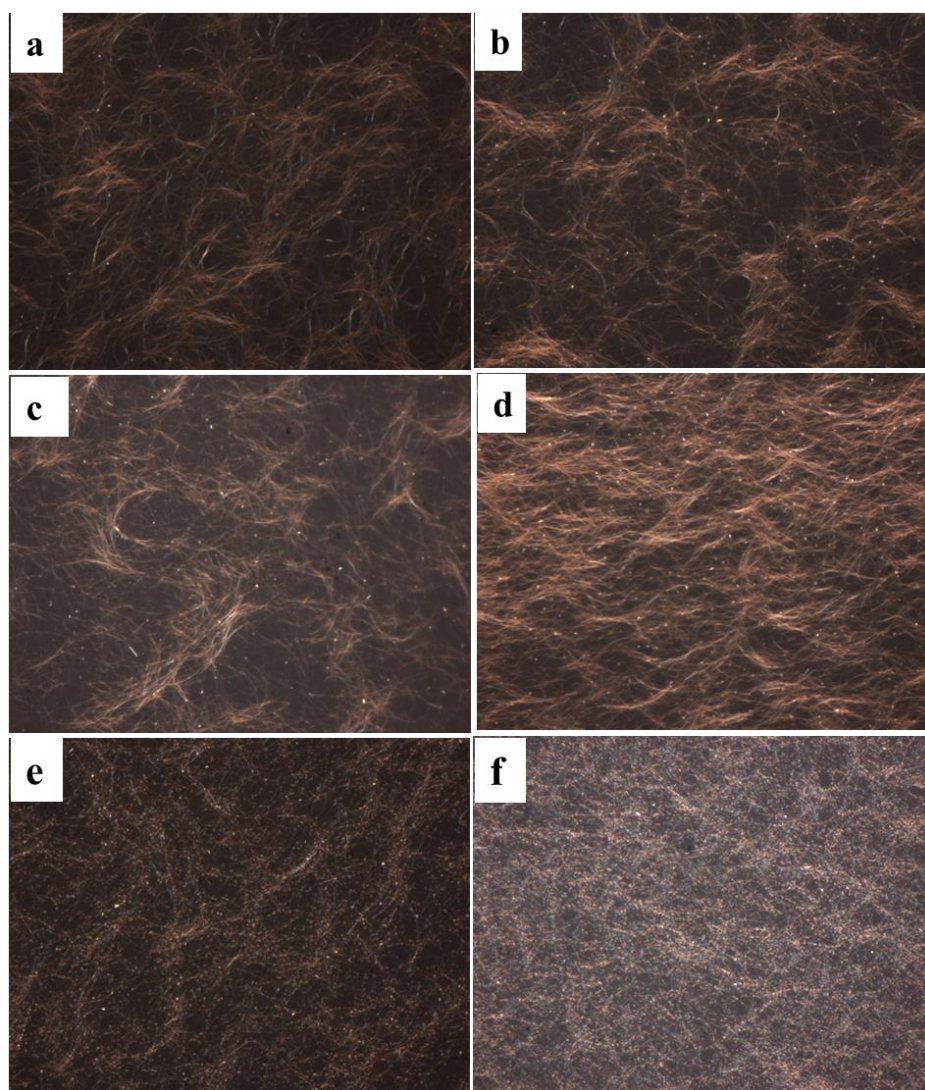


Figure S1. Optical microscope photos of AgNW films treated at (a) 25, (b) 100, (c) 150, (d) 170, (e) 200, and (f) 250 °C for 20 min. (1000× magnification).

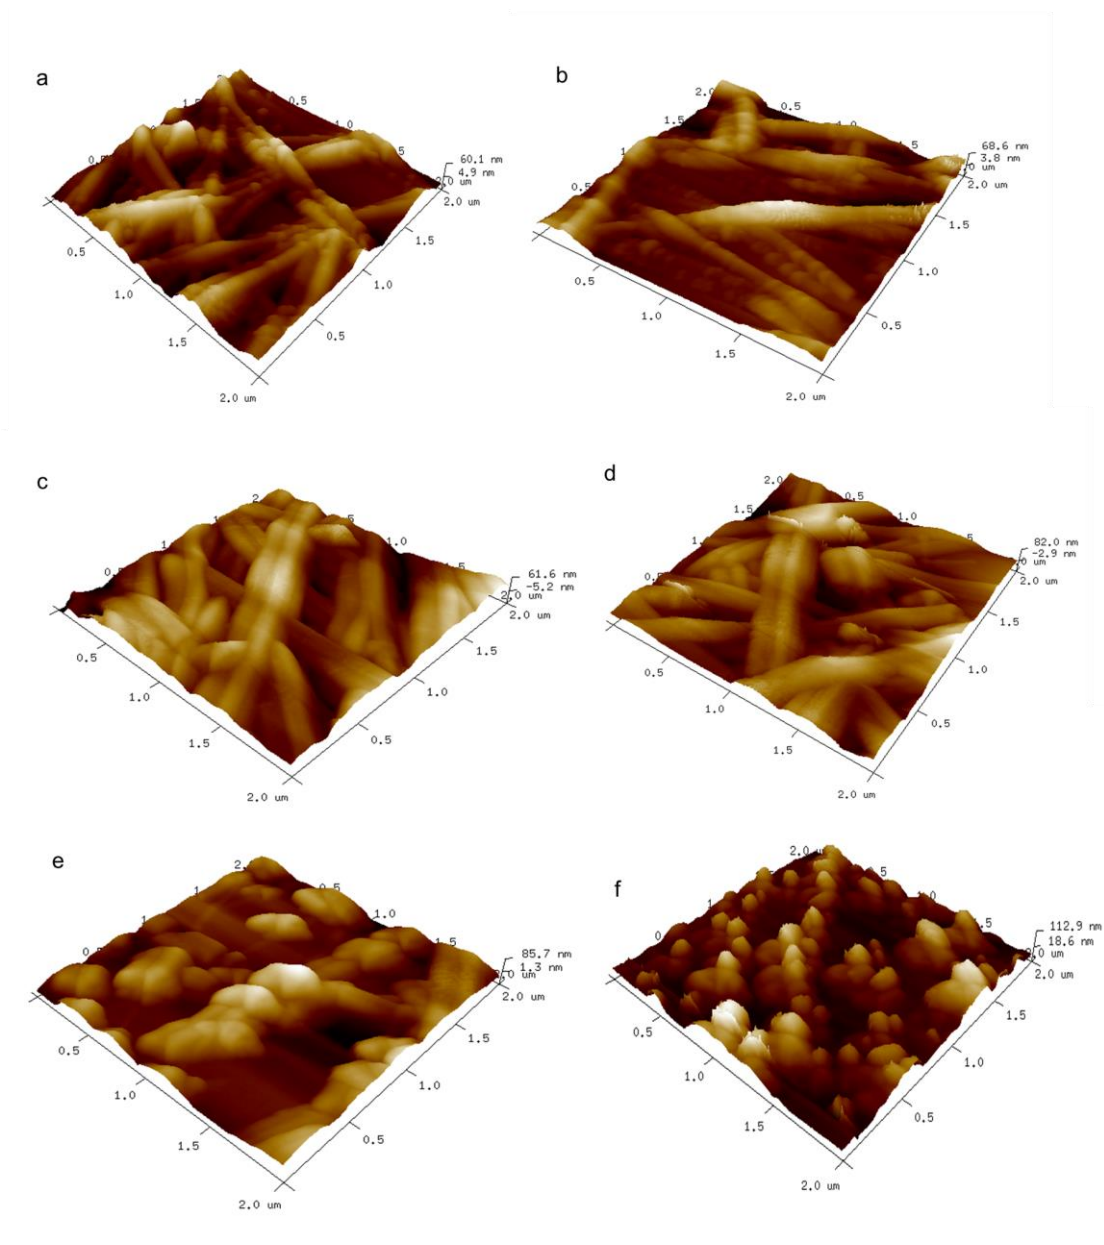


Figure S2. 3D AFM images of the AgNWs films treated at (a) 25, (b) 100, (c) 150, (d) 170, (e) 200, and (f) 250 °C for 20 min.