

Supplementary Materials: Effect of Fluorinated Comonomer, Polymerizable Emulsifier, and Crosslinking on Water Resistance of Latex Coatings

Jana Machotova ^{1,*}, Petr Knotek ², Eva Cernoskova ³, Roman Svoboda ⁴, Lucie Zarybnicka ^{5,6}, Miroslav Kohl ¹ and Andrea Kalendova ¹

- ¹ Institute of Chemistry and Technology of Macromolecular Materials, Faculty of Chemical Technology, University of Pardubice, Studentská 573, 532 10 Pardubice, Czech Republic; miroslav.kohl@upce.cz (M.K.); andrea.kalendova@upce.cz (A.K.)
- ² Department of General and Inorganic Chemistry, Faculty of Chemical Technology, University of Pardubice, Studentská 573, 532 10 Pardubice, Czech Republic; petr.knotek@upce.cz
- ³ Joint Laboratory of Solid State Chemistry, Faculty of Chemical Technology, University of Pardubice, Studentská 84, 532 10 Pardubice, Czech Republic; eva.cernoskova@upce.cz
- ⁴ Department of Physical Chemistry, Faculty of Chemical Technology, University of Pardubice, Studentská 84, 532 10 Pardubice, Czech Republic; roman.svoboda@upce.cz
- ⁵ Department of Technical Studies, College of Polytechnics Jihlava, Tolstého 16, 586 01 Jihlava, Czech Republic; lucie.zarybnicka@vspj.cz
- ⁶ Institute of Theoretical and Applied Mechanics of the Czech Academy of Sciences, Centre Telč, Prosecká 809/76, 190 00 Praha, Czech Republic
- * Correspondence: jana.machotova@upce.cz; Tel.: +420-466-037-194

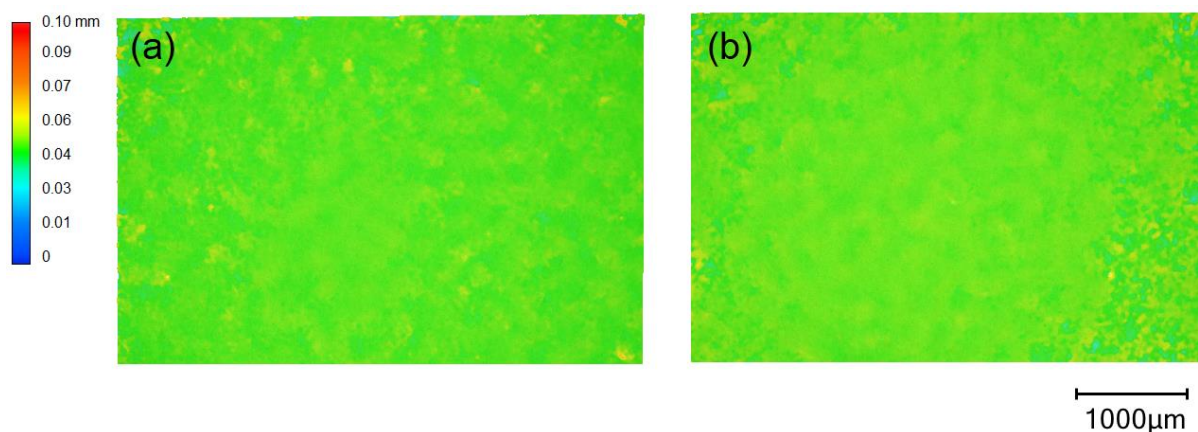


Figure S1. Macro surface appearance of latex coating films: (a) Sample D₀; (b) Sample H₀.