

Resistive Gas Sensors Based on Porous Sp-Containing Films Obtained by Dehydrohalogenation of PVDC and PVDC-PVC Copolymer

Oleg A. Streletskiy ^{1,*}, Ilya A. Zavidovskiy ^{2,*}, Islam F. Nuriahmetov ¹, Olesya Y. Nishchak ¹, Alexander V. Pavlikov ¹ and Natalya F. Savchenko ¹

¹ Faculty of Physics, M.V. Lomonosov Moscow State University, Moscow 119991, Russia; islam.nuriakhmetov@mail.ru (I.F.N.); nishchak@physics.msu.ru (O.Y.N.); pavlikov@physics.msu.ru (A.V.P.); n.f.savchenko@gmail.com (N.F.S.)

² Center for Photonics and 2D Materials, Moscow Institute of Physics and Technology, Dolgoprudny 141700, Russia

* Correspondence: streletskiy.oleg@gmail.com (O.A.S.); zavidovskii.ia@mipt.ru (I.A.Z.)

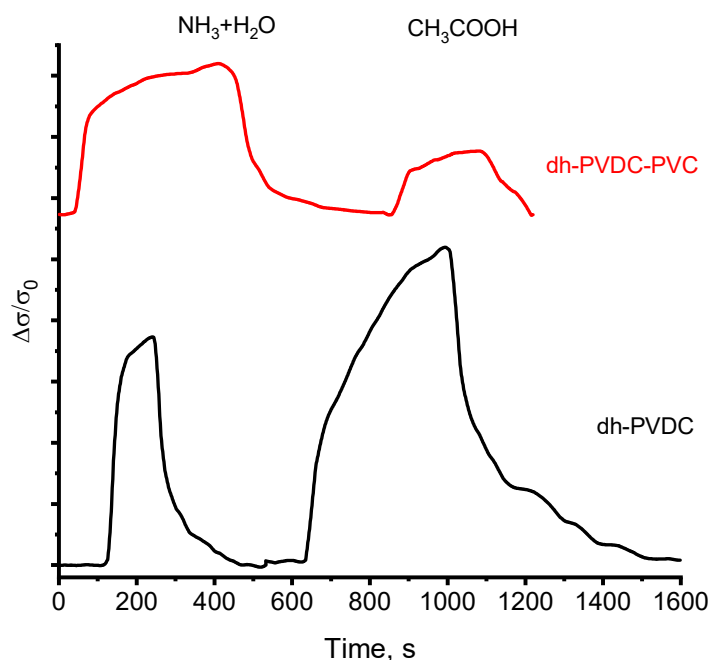


Figure S1. Time-resolved relative resistive sensing response of dh-PVDC-PVC and dh-PVDC to ammonium hydroxide and acetic acid vapors.