






Article

Low-Cost Embedded System Applications for Smart Cities

Victoria Alejandra Salazar Herrera ¹, Hugo Puertas de Araújo ¹, César Giacomini Penteadó ², Mario Gazziro ¹
and João Paulo Carmo ^{3,*}

¹ Department of Engineering and Social Sciences (CECS), Federal University of ABC (UFABC), Av. dos Estados, 5001, Santo André 09210-580, Brazil; victoria.herrera@ufabc.edu.br (V.A.S.H.); hugo.puertas@ufabc.edu.br (H.P.d.A.); mario.gazziro@ufabc.edu.br (M.G.)

² Department of Computer Science, University of Marília (UNIMAR), Avenida Hygino Muzzy Filho, 1001, Marília 17525-902, Brazil; cesargiacomini@gmail.com

³ Group of Metamaterials Microwaves and Optics (GMeta), Department of Electrical Engineering (SEL), University of São Paulo (USP), Avenida Trabalhador São-Carlense, Nr. 400, Parque Industrial Arnold Schimidt, São Carlos 13566-590, Brazil

* Correspondence: jcarmo@sc.usp.br

Abstract: The Internet of Things (IoT) represents a transformative technology that allows interconnected devices to exchange data over the Internet, enabling automation and real-time decision making in a variety of areas. A key aspect of the success of the IoT lies in its integration with low-resource hardware, such as low-cost microprocessors and microcontrollers. These devices, which are affordable and energy efficient, are capable of handling basic tasks such as sensing, processing, and data transmission. Their low cost makes them ideal for IoT applications in low-income communities where the government is often absent. This review aims to present some applications—such as a flood detection system; a monitoring system for analog and digital sensors; an air quality measurement system; a mesh video network for community surveillance; and a real-time fleet management system—that use low-cost hardware such as ESP32, Raspberry Pi, and Arduino, and the MQTT protocol used to implement low-cost monitoring systems applied to improve the quality of life of people in small cities or communities.

Keywords: Internet of Things—IoT; smart cities; low-end hardware; social applications



Academic Editors: Muhammad Kazim, Mujeeb Ur Rehman and Stefan Kuhn

Received: 23 October 2024

Revised: 18 December 2024

Accepted: 10 January 2025

Published: 22 January 2025

Citation: Herrera, V.A.S.; de Araújo, H.P.; Penteadó, C.G.; Gazziro, M.; Carmo, J. Low-Cost Embedded System Applications for Smart Cities. *Big Data Cogn. Comput.* **2025**, *9*, 19. <https://doi.org/10.3390/bdcc9020019>

Copyright: © 2025 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

The Internet of Things (IoT) is taking a preponderant role in the development of modern society [1], and it has evolved to encompass billions of devices across numerous domains, including healthcare, industrial automation, agriculture, and smart cities [2].

In healthcare, IoT devices—including wearables [3]—enable remote patient monitoring, fitness activity tracking, and smart medical equipment integration, enhancing treatment outcomes and reducing costs [4]. Industrial settings benefit from IoT through predictive maintenance, efficient resource allocation, and improved safety measures. The integration of IoT in urban environments has given rise to the concept of Smart Cities [5], where advanced technology and data analytics optimize city operations and enhance the quality of urban living.

Smart cities utilize IoT devices and networks to gather and analyze vast amounts of data from various sectors, including energy, transportation, public safety, and healthcare. Integrating data from devices through the cloud (fog) facilitates real-time decision making, resource management, and improved service delivery [6]. For instance, urban mobility is enhanced through IoT-powered smart traffic management systems that reduce congestion and improve public transportation efficiency.

Energy management in smart cities is transformed through smart grids that dynamically adjust energy supply based on consumption data, reducing waste and carbon footprints. Public safety is also improved, with IoT-enabled surveillance systems and predictive policing helping police respond more efficiently, especially in underserved areas.

While smart cities often leverage high-performance IoT systems, there is a growing trend towards utilizing low-end hardware such as microcontrollers and low-cost sensors in IoT applications [7,8], especially in resource-constrained settings. These devices, including microprocessors like the ESP32 or Arduino boards (Espressif Systems, China), offer a cost-effective solution for connecting everyday objects, creating affordable IoT systems. Low-end hardware is particularly beneficial in scenarios where cost and simplicity are critical.

Despite their limited processing power, these components can efficiently handle real-time data collection and communication thanks to improvements in lightweight IoT protocols such as MQTT [9] and CoAP. In regions with limited technological infrastructure or low-income populations, the use of low-end IoT hardware provides an avenue for enhancing productivity and connectivity. From improving access to healthcare to enhancing agricultural yields through smart sensors, these technologies make the IoT more accessible, fostering digital inclusion and societal benefits [10].

The rapid expansion of IoT technology presents opportunities and challenges, particularly in ensuring data privacy, security, and scalability. Nevertheless, the IoT remains a critical driver of technological innovation and societal transformation, representing the next step in the evolution of urban spaces and addressing modern challenges while improving sustainability and enhancing the lives of citizens by enabling policy-makers to be more proactive instead of just reacting to events.

By addressing these challenges and opportunities, we can unlock the full potential of IoT applications in low-income populations, promoting greater access to essential services and improving the overall quality of life, mainly in areas where the state is absent. Enforcing the use of low-cost hardware such as ESP32, Raspberry Pi (Newark Corporation, Chicago, USA), Arduino, and the MQTT protocol for the implementation of low-cost monitoring systems can be applied to improve the quality of life of people in small cities or communities.

The following sections present the related work and some applications as follows: the implementation of a monitoring system for analog and digital sensors based on ESP32 and Raspberry Pi Pico; a flood detection system based on Arduino hardware and AWS cloud services; an air quality measurement system based on ESP32 and Raspberry Pi; a mesh video network for community surveillance; and a real-time fleet management system.

2. Related Work

2.1. Low-Power Wide-Area Networks

Part of the current success of IoT is its incorporation to Low-Power Wide-Area Networks (LPWAN), which allows us to extend the coverage of IoT applications to low power consumption devices and networks [11,12].

There are several long-range LPWAN technologies that are under current use and development, such as LoRaWAN/LoRa, LTEM, Sigfox, NB-IoT, and MQTT [13]. Each of them may or may not consist, in both the physical and logical layer, of the wireless communications system. For instance, MQTT only develops a single-layer communications protocol that sends small messages, so it can be, in principle, mounted on any physical infrastructure [13], which is the reason why we adopted this protocol in our presented applications. On the other side, NB-IoT and LTEM have multi-layer protocols because they are mainly adapted to 4G physical layers. In this sense, we can talk about a set of LPWAN communications protocols that possess the same features as small frames, few

frames, simple security and integrity techniques (if any), as well as several identifiers for users and devices [13]. Research has been done on the development and application of LPWAN protocols [14].

2.2. Data Encryption

Data encryption techniques are used in order to keep secure the information that is transmitted through a communications network or for exchanging sensitive data between users or groups of users. These techniques become essential when the exchange of information is done between devices, where there is no user to control the criteria of what information can be shared and what information should not be shared. This implies that it is necessary to choose the appropriate techniques for the type of application and/or system [15].

The cipher algorithms are generally defined by mathematical components. In Table 1, the common elements of such a cryptosystem are shown.

Table 1. Cryptosystem mathematical components [16].

Variable	Meaning
P	Set of possible plain text
C	Set of possible cipher text
k	Set of possible keys
$\epsilon P_i(k)$	Encryption rule
$\delta P_i(k)$	Decryption rule

The ideal cryptosystem is defined by having a big set of k and C in order to frustrate brute force attacks. Therefore, for IoT-ready architectures, we must design such a cryptosystem while reducing the processing burden involved with it as much as possible. The shift cipher is the most basic cipher algorithm, and as its name suggest, it consists of shifting an n -alphabet and changing the corresponding object of the alphabet. The metrics of the shift cipher have $n - 1$ possible shifts; in general, this one has $P = C = k$. The operation of shifting is done by Equations (1) and(2) as follows [16]:

$$\epsilon P_i(k) = (P_i + k) \bmod(n) \quad (1)$$

and

$$\delta P_j(k) = (P_j - k) \bmod(n) \quad (2)$$

where P_j is the encoding (ϵP_i) and the k value must be the same for the decoding δP_j .

3. Building a Monitoring System for Analog and Digital Sensors

People with physical disabilities may need a certain level of automation at home to facilitate daily activities. An example of this is presented in [17], which describes a pilot study conducted with people with physical disabilities at home to investigate the effectiveness of home modification in improving the quality of life. In some cases, simple technologies are enough, for example, [18] indicates that Alexa helps consumers with special needs to regain their independence and freedom.

Inspired by such necessity, we work on how to monitor some variables for applications on the remote activation of devices at home. Specifically, we describe the use of the ESP32 and Raspberry Pi Pico W in conjunction with MQTT to create a remote monitoring system for sensors. The goal is to promote a communication and monitoring system for variables, whether they are analog or digital, as well as to enable the remote activation of devices,

such as turning on lamps and using low-cost components and the available Wi-Fi network in residences.

For communication via the MQTT protocol, the use of a broker is necessary, as it serves as a kind of server that manages the communication between the devices connected to the network. As mentioned before, these devices will be the ESP32, the Raspberry Pico W, and the dashboard that will be used to monitor the variables.

As shown in Figure 1, both the broker and the dashboard utilize mobile applications that can be downloaded for free, which helps reduce the project's costs.

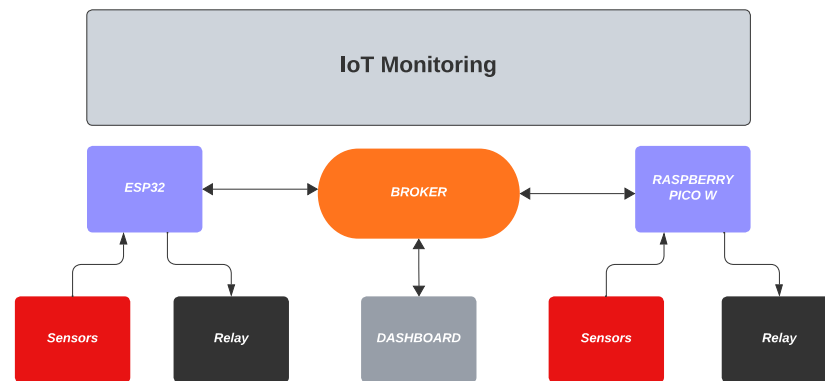


Figure 1. Block diagram of the assembled MQTT network with the main components.

3.1. Materials and Technologies Applied for System Implementation

For the implementation, we used the ESP32 and Raspberry Pico W microcontrollers, as well as temperature and humidity sensors, a reed switch sensor, and a relay for output control. All of them are described in the following.

The DHT22 is a humidity and temperature sensor with a calibrated digital output, ensuring reliability and stability. It has an 8-bit chip and is calibrated in a precise chamber, with the coefficient stored in OTP memory. The sensor is small, low-power, and allows for long-distance transmission (up to 100 m).

The reed switch is a magnetic field sensor that closes its contacts when a magnet approaches and opens them when it moves away. To monitor the opening and closing of doors and windows, a model with a plastic casing was used in order to facilitate the installation.

Microcontrollers operate with voltages ranging from 3.3 VDC to 5 VDC, making it necessary to use relays to control devices that require higher voltages. The project used a 5 VDC electromechanical relay, with contacts that can handle up to 8 A, to actuate the door/window latch.

The ESP32 and Raspberry Pico W microcontrollers were used to demonstrate the versatility of the MQTT protocol, which is open and has a low cost. Programming was performed in MicroPython version 1.24.1, a lightweight version of the Python language optimized for microcontrollers that available under the MIT license. The Thonny software Version 10.0 was used to transfer the code to the microcontrollers.

As it is an application for residential use, it is important to have a simple way of controlling the system for any kind of user; for this reason, smartphone applications are needed. The MQTT protocol requires a broker to manage messages between connected clients and a dashboard to monitor the network information. An application is used to display temperature values, humidity, reed sensor status, and relay output.

The Narada MQTT broker is an open source broker for Android, ideal for prototyping MQTT servers on smartphones. The choice of Android is based on data from Statcounter, available as of April 2024, which show that 81.38% of smartphones in Brazil use Android

OS, while 18.39% use iOS, [19]. The application allows for configuring access to the MQTT network, including the router's IP address, username, and password for security.

A dashboard can be a mobile application, a PDF file, or a physical screen displaying information. In the context of information technology, it is a visual panel that centralizes indicators and metrics, assisting in decision making. Technical dashboards analyze device performance and availability, while business management dashboards provide an overview of organizational performance. In this application, the MQTT Dashboard is a mobile application that, when connected to the broker, receives data such as temperature, humidity, and door status in real-time, also allowing for the configuration of a button to trigger the relay output of the prototype [20].

3.2. Implementation Steps

We begin this section by describing the electrical diagrams of the circuits that represent the clients controlled by the ESP32 and Raspberry Pico embedded in them. These circuits will process the sensor signals and send them to the broker via the MQTT protocol. One of the circuits uses the ESP32 as a base, as shown in Figure 2, while the other uses the Raspberry Pico W, as shown in Figure 3, thus demonstrating that the protocol can be used on different platforms.

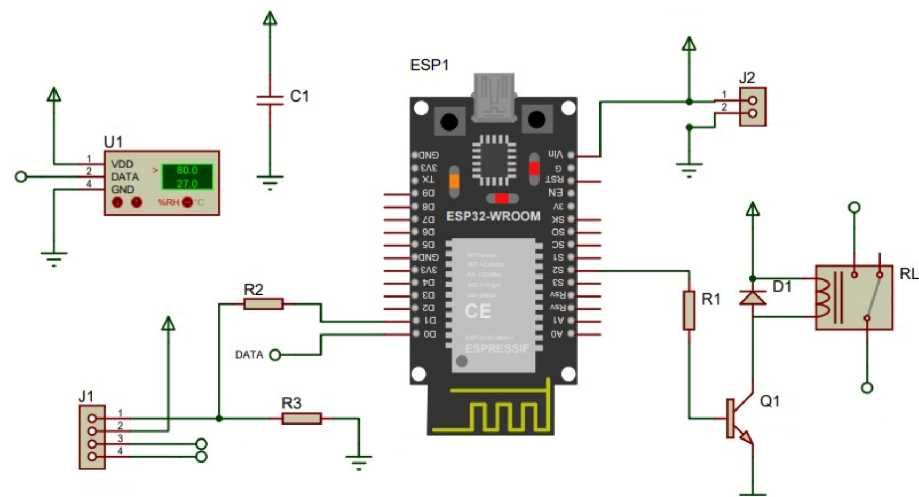


Figure 2. Electrical diagram of the MQTT client that is controlled by the ESP32.

For the MQTT broker, the mobile application Narada MQTT was configured. After the broker's configuration and initialization, we can observe the broker's connection with the prototypes, as it is possible to monitor the activities of publishing and subscribing to the defined topics (C1 = Client1 (RASPBERRY); C2 = Client2 (ESP32); T = Temperature; U = Humidity; R = Reed Switch; S = Relay Output).

Subsequently, the configuration and assembly of the dashboard were carried out. To this end, the mobile application MQTT Dashboard was used. After linking the dashboard icons with the topics, the temperature and humidity data began to be displayed, along with the status icon of the reed switch and the relay output activation icon. After this step, tests were initiated for activating the relay output and testing for the status of the reed switch. Examples of configuration screens are shown in Figure 4.

When activating the locking icon of Client1 (relay output, identified as "lock" on the dashboard), it publishes the payload value defined in the program stored on the RASPBERRY to the topic C1/S/. In the case of the ESP32, it publishes to the topic C2/S/ as Client2. The microcontrollers, configured to perform polling every 5 s, check for changes

in the topic and execute the action defined in the program. In this case, the defined action is to turn on the relay and, consequently, activate the load, which, in this case, is an LED.

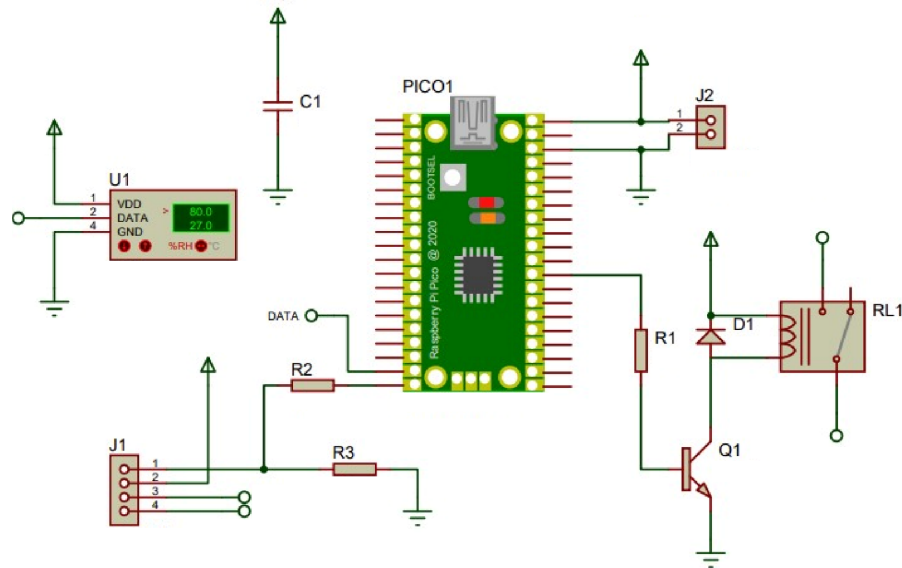


Figure 3. Electrical diagram of the MQTT client that is controlled by the Raspberry Pico W.



Figure 4. Smartphone application interface.

Thus, it was concluded that the commands executed via the dashboard to activate the relay output of both prototypes worked as designed. For the reed switch test, a structure was built in the prototype aimed at simulating the operation of a door or window.

The goal is to show that when the “door” is opened, the reed switch will open its internal electrical contact. Thus, a signal will be sent to an input of the microcontroller that, by identifying the change in status, will publish the payload value defined in the program to the topic C1/R/. In this case, the dashboard will receive this information and change the icon representing the door as open/closed.

It can also be observed on the dashboard that the monitoring of temperature and humidity works normally, updating every 5 s. This time can be adjusted to allow, this and other variables, to poll more frequently. Therefore, the full functionality of the reed switch and its respective indication on the dashboard was confirmed.

It should be noted that the topics identified with “C1” refer to the RASPBERRY prototype and the topics identified with “C2” refer to the ESP32 prototype. The MQTT protocol operated adequately during the tests of the connected devices. No connection failures between the components were observed, and all commands for activating devices and receiving the status of the variables were executed satisfactorily.

Finally, in Figure 5, we present the diagram showing the entire data flow of the network using the MQTT protocol.

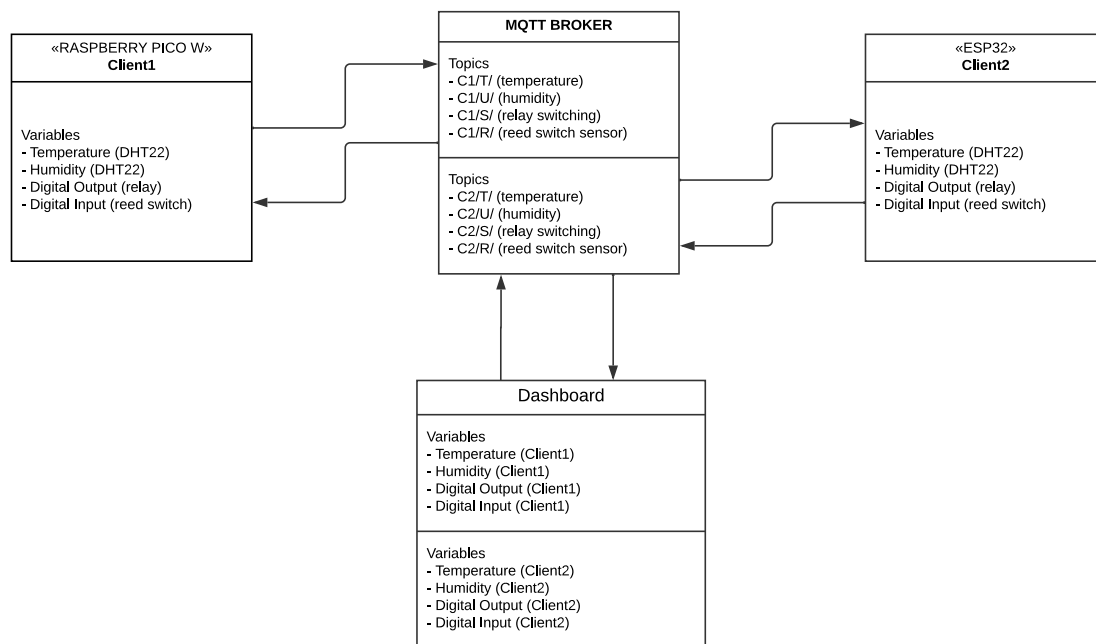


Figure 5. Diagram of the MQTT network showing in detail the communication between the connected components.

For cost and security reasons, a residential router completely disconnected from the internet was used. The system can be used for online monitoring using servers, for example, but additional costs must be considered (use of private brokers, as using public brokers may lead to data leakage) and also the quality of service (QoS) level, aiming to prevent possible external attacks on the network.

The use of two distinct microcontrollers aims to demonstrate that the protocol can be executed on different hardware, providing more options for evaluation concerning cost/performance factors.

As a point of improvement, it is suggested to implement battery-powered supply sources for all network components in cases where there is a brief power outage. Some attention is needed to the number of devices connected to the MQTT broker to avoid excessive latency, data loss from the topics, or connectivity issues.

4. Urban Precipitation Monitoring System

Climate change has intensified in recent years, and the lack of adequate planning in urban areas further increases the risk of flooding. Given this context, it is crucial to develop more effective ways to alert the population about the danger of flooding and, simultaneously, find ways to minimize the negative impacts that these events can cause. To

this end, this study developed a prototype of an Urban Precipitation Monitoring System (UPMS) that integrates hardware, software, and cloud solutions to identify flood events, alerting the community in the affected region as quickly as possible. The system uses sensors connected to an Arduino microcontroller, which processes data in real-time, triggering audible and visual on-site alarms, while sending the data to a public web server. In the cloud, data storage and analysis are performed through Amazon Web Services (AWS), ensuring information security and sending automatic notifications by email. This work offers an alternative solution that helps people in a flood event make quick decisions to protect their safety and belongings.

4.1. System-Level Description

The Urban Precipitation Monitoring System (UPMS) was developed to detect flooding and send warning messages about imminent danger to residents in affected areas. The system continuously monitors water levels (of a local river, for instance) and when they reach a critical point, it automatically triggers the alarms, ensuring a fast and effective response is taken in the region where the UPMS is installed.

Recognizing that part of the population may not have access to the internet and may therefore be more vulnerable in risky situations, the UPMS alarms were divided into two distinct groups, as shown in Figure 6.

Local Group: The alerts are transmitted via an LCD connected to the microcontroller, which displays the flood level, along with an audible warning, alerting people in the area to move away. For this group, the UPMS does not require an internet connection, ensuring that the alert is issued directly on-site.

Mobile Group: The data are transmitted via an ethernet module connected to the microcontroller, which creates a local web server. This server is replicated to a public Internet Protocol (IP) web server. Using AWS cloud services, data are processed and an alert is generated in the form of an email sent to people registered in the mobile group system.

Figure 6 also shows the design of the entire system. A physical device is placed close to the body of water to be monitored. Such a device is composed of an Arduino UNO board, a water-level sensor, an LCD, and a buzzer for visual and audible alarms.

In this simple PoC (Proof-of-Concept) project, the Arduino UNO board was connected to an ethernet shield to provide easy internet access for the system. In a real-world scenario, some form of long-range communication would likely be required, which could range from a simple Wi-Fi connection to a nearby Access Point to a more elaborate solution like LoRA, Sigfox, or even a satellite link. This would depend on the geographic location of the monitored body of water and the local availability of communications technology.

A dedicated web server is deployed locally on the device and its purpose is to communicate (all internet stack: HTML, javascript, CSS, etc.) with another web server hosted elsewhere in the cloud (AWS EC2 or NGROK, for production). The purpose of this server is to provide a public IP for the users' access.

Through the public IP, the application gets access to AWS services, like the ones described in the sequence.

AWS IAM is a service that allows you to securely control access and permissions to AWS resources.

AWS EventBridge is a serverless service that makes it easy to build applications by connecting components through events.

In this work, EventBridge was used because of its Schedule functionality, which allows you to trigger other AWS services based on time settings. Specifically, it was configured to trigger AWS Lambda every 1 min.

Amazon S3 is an object storage service that offers scalability, availability, security, and performance. In this work, it was necessary to store the algorithm code in a bucket in S3. Since the package, including the required libraries, exceeded the 10 MB limit allowed for direct upload to AWS Lambda, it was stored in S3. AWS Lambda was configured to point to the package’s private link in the bucket, ensuring its execution.

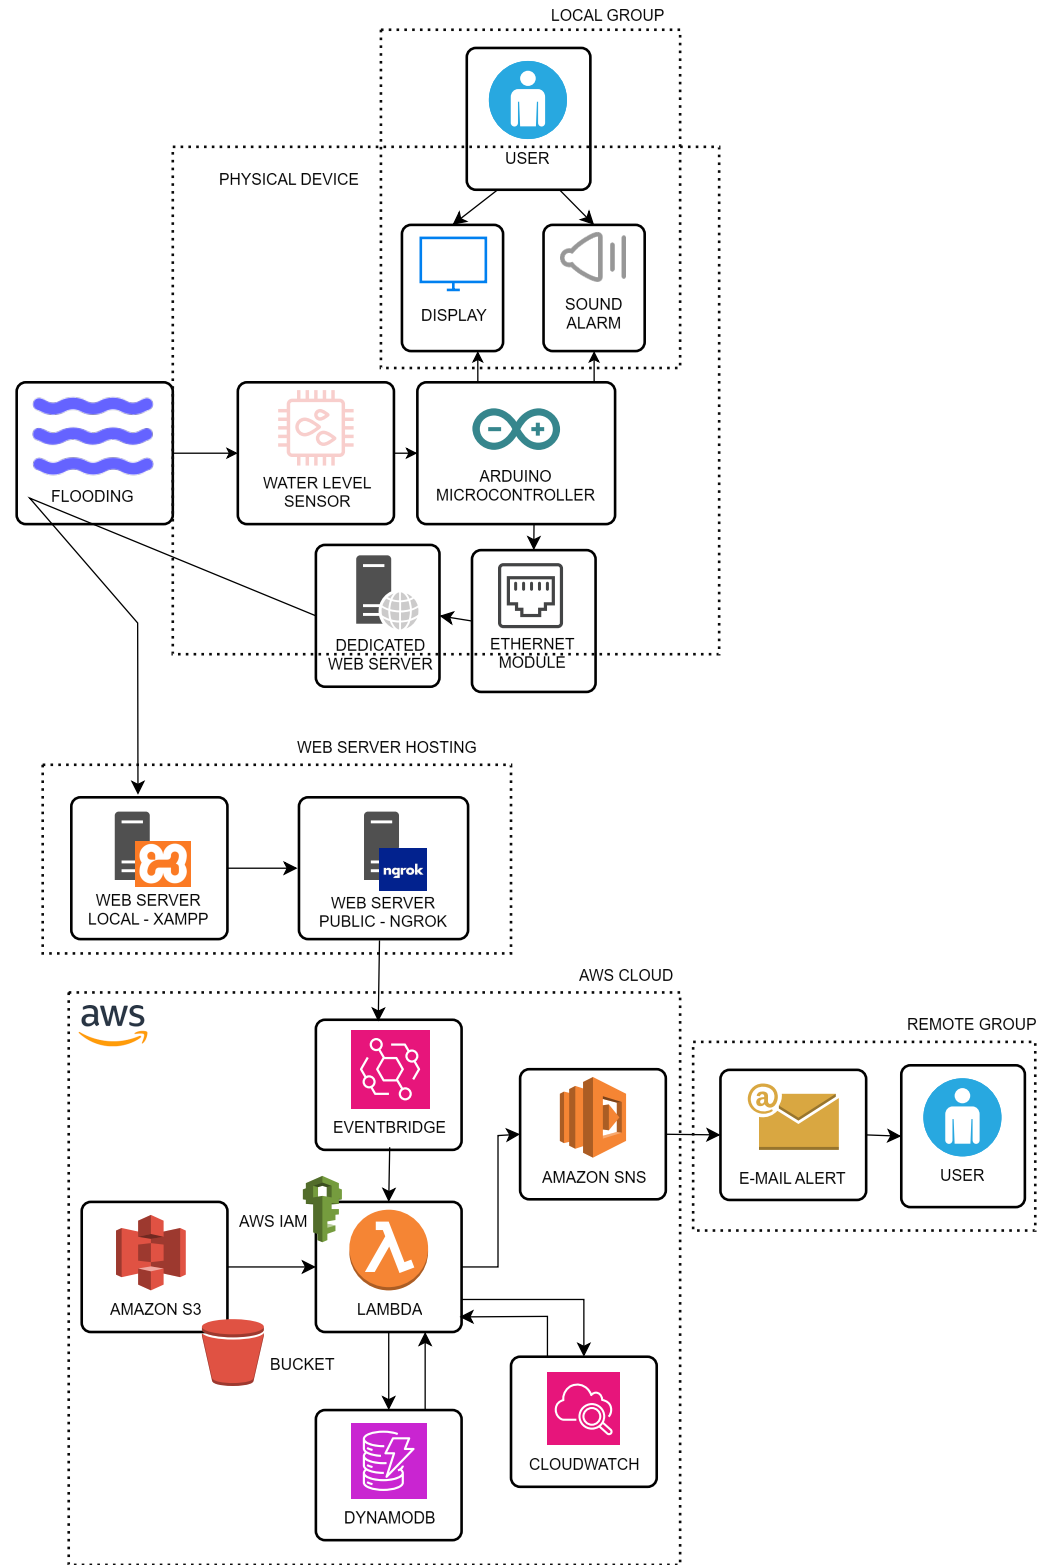


Figure 6. Details of the UPMS components.

Amazon DynamoDB is a fully managed, serverless Not Only SQL (NoSQL) database that delivers sub-ten-millisecond latency performance at any scale. In this application, DynamoDB was chosen for its speed and easy integration with AWS Lambda. The database is used by the algorithm to store water level status, a crucial piece of information for the Lambda function's business logic.

Amazon SNS enables users to receive notifications via push, email, SMS, and other channels, making it easy to send messages to recipients subscribed to a topic. In the context of this project, SNS acts as the output channel, sending email alerts to users subscribed to the topic whenever the Lambda function algorithm detects a flooding situation, as defined in the business rules.

Amazon CloudWatch monitors resources and applications running on AWS in real time, allowing the collection and monitoring of metrics that help evaluate the performance of these resources and applications. During the execution of this work, CloudWatch was essential for debugging errors, in addition to providing real-time logs that ensured the observation of application responses.

Finally, the system works in a serverless mode, meaning the entire flow of commands and actions is coordinated through lambda functions, instead of a central server. AWS Lambda executes code in response to events, automatically managing compute resources without the need of servers. In this project, AWS Lambda executes code that processes water-level data from the public web server. When triggered by EventBridge, Lambda orchestrates the execution, interacting with other AWS services to send the alert.

The serverless operation increases the system's scalability, allowing new services to be added or current services to be expanded without having to change the fundamental structure of the application.

4.2. Hardware Implementation

Figure 7 shows a detailed Proteus simulation of the hardware designed for this application.

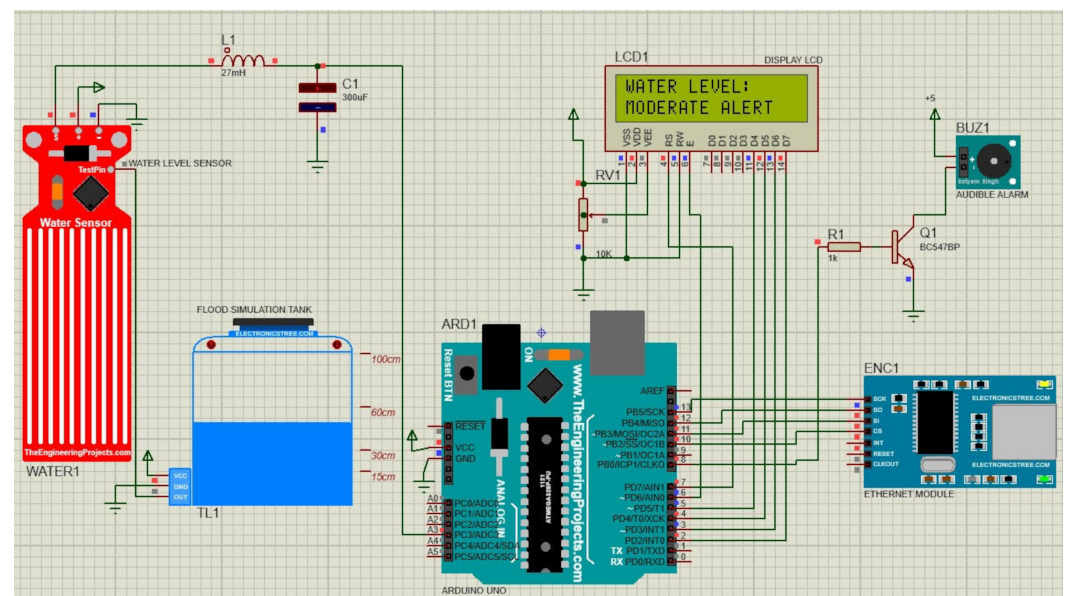


Figure 7. Proteus simulation of the UPMS.

As mentioned earlier, the Arduino UNO board is the central piece of the system. It executes the embedded code; activates the buzzer delivering a digital high-level voltage to the base of the transistor Q1; sends graphic messages to the LCD; negotiates the communication protocol with the ethernet shield ENC1; and receives water-level data from the sensor WATER1 (HESAI, Shanghai, China).

Since the water level sensor sends analog signals (a variation in ohmic resistance depending on the presence of water), an LC low-pass filter was provided before the signal reaches the Arduino's analog input port. As can be observed, the system monitors up to four predefined water levels.

In the circuit of Figure 7, RV1 is a potentiometer used to adjust the LCD backlight.

In line with the goals of this project, all components are affordable and readily available at local electronics stores. This ensures that even low-income communities can implement a flood monitoring system, regardless of government support.

Receiving early warnings about floods can save lives and help preserve people's property.

5. Air Quality Measurement Station

Growing concerns about air quality and its impact on human health and the environment have driven the search for affordable and effective monitoring solutions, especially for resource-limited communities that face additional challenges in accessing information about air quality and the presence of harmful particles.

For this project, a low-cost air quality monitoring station was created, especially aimed at underprivileged communities without access to environmental measurement data. The idea is to understand how pollution in these places affects air quality and, consequently, the health of the people who live there.

To this end, sensors connected to a microcontroller (Arduino) were used to measure pollutants such as NO_2 , CO_2 , smoke, and ozone, as well as temperature and humidity, which are also essential for good air quality.

The collected data are sent to a Raspberry Pi, which functions as a data storage system in a local MySQL database.

The Raspberry Pi also has Grafana installed, which is software that allows the collected data to be viewed on dashboards clearly and in real time.

This way, it will be possible to monitor air quality and take measures to improve the environment.

This monitoring station is a practical and affordable solution that aims to provide essential data to improve air quality and the health of people in underprivileged areas. In addition to monitoring particle concentrations and the presence of harmful gases, the system also aims to identify pollutants generated by human agglomerations, thus expanding its usefulness in densely populated urban environments. To achieve this purpose, different sensors compatible with the Arduino platform were used, such as the Particle Sensor PMS5003 and the MQ Gas Sensor, allowing detailed and comprehensive monitoring.

5.1. System-Level Description

Figure 8 presents the overall structure of the system. Sensor data are acquired by an Arduino UNO board and sent to a Node-RED instance running on a local server embedded in the Raspberry Pi board. RPi also serves the Grafana dashboard software, version 11.4.

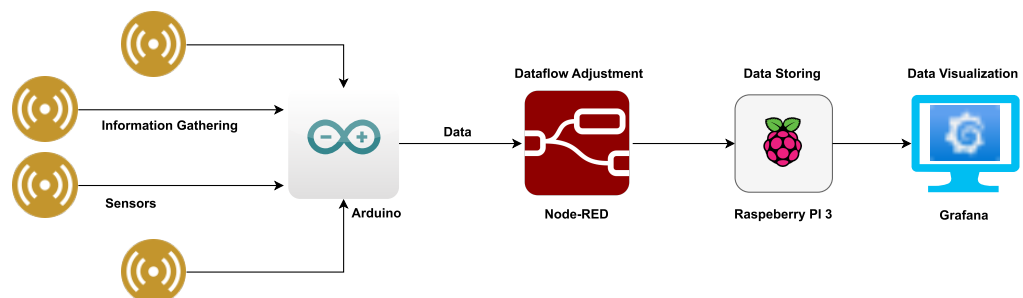


Figure 8. System components.

This setup assumes that all sensor data preprocessing, packaging, and transmission are done by the Arduino UNO system (HW and SW). While the RPi is responsible for data storage and presentation.

The software components of the system are as follows:

- Maria DB. MariaDB is a high-performance, open source database developed by the community as a fork of MySQL. It is widely used to store data in a variety of formats. Its applications include operation monitoring, IoT sensor data collection, and real-time analytics.
- Node-RED. Node-RED is a flow-based, low-code development tool designed for visual programming. The platform is used to wire together hardware devices, APIs, and online services, enabling developers to build IoT (Internet of Things) applications, automation systems, and other data-driven workflows with minimal coding. Node-RED presents a browser-based editor, allowing users to drag and drop nodes that represent different actions.
- Grafana. Grafana is an open source platform designed for data visualization, monitoring, and analytics. It allows users to query, visualize, and set alerts for metrics, logs, and traces, regardless of where the data are stored. Grafana is commonly used to create interactive dashboards composed of panels that display data in various forms, such as graphs, charts, and other customizable visualizations.

The system components interact with each other through Node-RED, which orchestrates the acquisition of data from Arduino and its integration into MariaDB. They are installed on the Raspberry Pi board.

Figures 9 and 10 show the graphical interfaces of Node-RED and Grafana. Both are web-based and are accessible through a local browser.

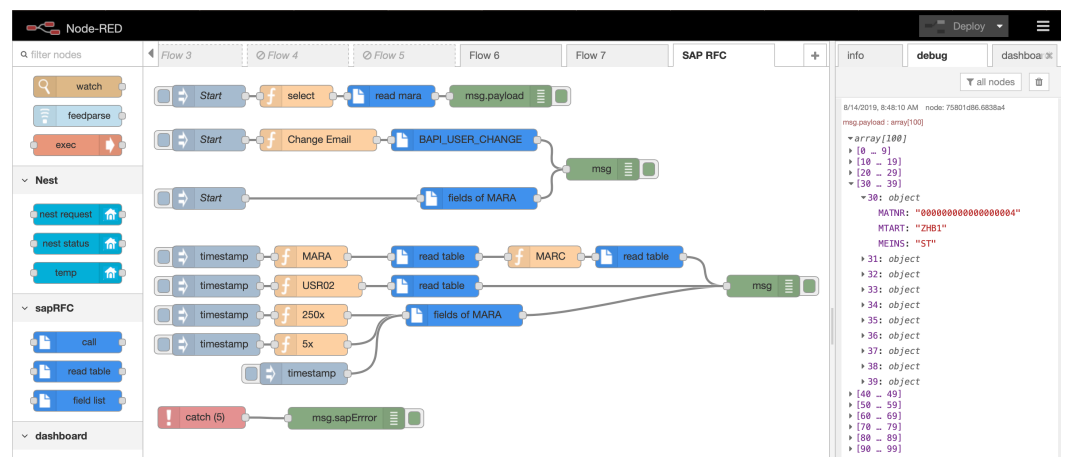


Figure 9. Node-RED web-based graphical interface.

The Node-RED module plays a crucial role in integrating and storing data collected by sensors. Its main functions are as follows: receiving data from the measurement device, converting this information to JSON format, filtering and formatting the data to make it compatible with database tables, and finally storing it in the MariaDB database.

Along with the software components described above, mention should also be made of the operating system on the Raspberry Pi and the firmware on the Arduino, which was developed using the Arduino IDE as a programming platform.



Figure 10. Grafana web-based graphical interface.

5.2. Hardware Implementation

Figure 11 shows the physical implementation of the Air Quality Measurement Station in a breadboard. Here, the Arduino board is the central piece of the system, connecting and providing power to the sensors.

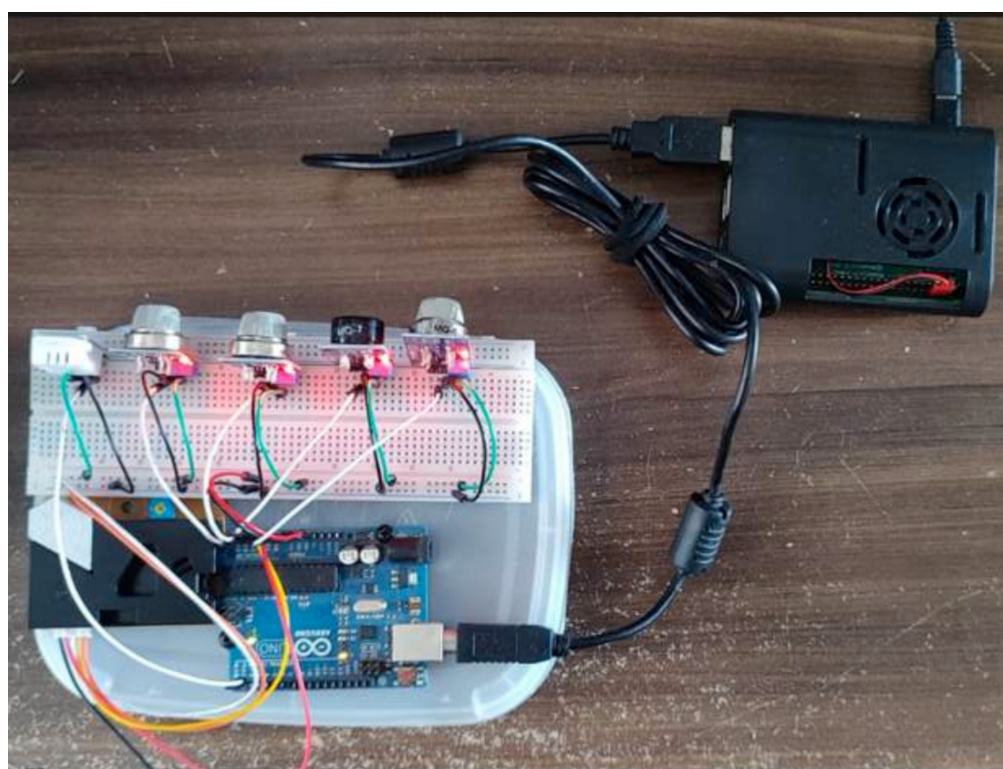


Figure 11. Air Quality Measurement Station.

Below is a list of the sensors that are used in the system. All of them can be easily purchased from local electronics stores at a low cost.

- MQ-135 (WINSSEN, Guangzhou, China): To measure the concentration of gases such as NO_2 and other pollutants.
- MQ-7 (HANWEI, Zhengzhou, China): For the detection of carbon monoxide (CO).

- MQ-5 (WINSEN, Guangzhou, China): To detect a range of gases, including smoke and combustible gases.
- MQ-131 (WINSEN, Guangzhou, China): For ozone (O_3) measurement.
- DSM501-A (SAMYOUNG, Seongnan, South Korea): To measure airborne particles such as PM_{10} and $PM_{2.5}$.
- AM2302 (Analog Power, San Jose, USA): To measure the temperature and humidity of the environment.

Sensor measurements are transmitted through Wi-Fi to the server in the Raspberry Pi board. For the interaction with the Arduino hardware, some third-party libraries were used, like the GasSensor.lib, for instance. All libraries are widely available through the IDE interface.

Arduino's firmware flow diagram can be seen in Figure 12, also given in a written format as listed below.

- Initializes all Arduino devices and sensors.
- Uses specific library functions to define conversion curve parameters.
- Starts reading the Arduino analog ports to receive the values measured by the sensors.
- Calls the functions that determine the correct concentration of each pollutant in ppm.
- Inserts the collected data into an object in bytes, which is placed in the transmission queue to be sent to the application in Node-RED.
- After a one-minute delay, the process of reading sensor measurements is repeated in a loop.

Arduino's firmware is implemented in C-language.

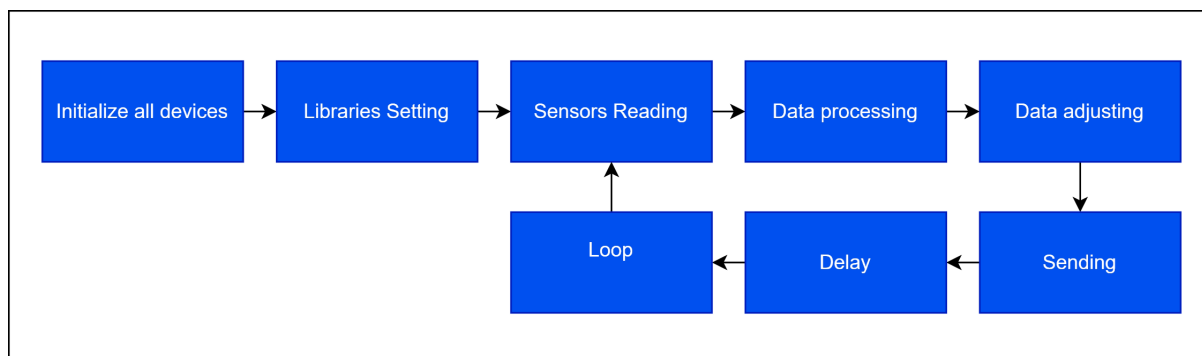


Figure 12. Arduino's firmware flow diagram.

5.3. Some Results

This section provides some results obtained during the tests of the system.

Data monitoring was carried out for eight days in a closed environment, using the prototype mounted on a breadboard. The objective was to observe the variations and performance of the device over this period. The collected measurements were used to calculate the average of the values recorded during the eight days, which were later exported to a spreadsheet for analysis and documentation.

Table 2 presents the results of 8 days of monitoring air quality data and Figure 13 shows the graphic for the presence of microparticles.

No further graphics are shown here to save space.

Table 2. Final results after 8 days of monitoring.

Date	PM _{2.5} (µg/m ³)	PM ₁₀ (µg/m ³)	Smoke (ppm)	CO (ppm)	NO ₂ (ppm)	O ₃ (ppm)	SO ₂ (ppm)	Temp. (°C)	Umid. (%)
7 January 2024	4.09	3.49	4.87	4.87	4.81	4.87	0.00	23.6	43.0
7 February 2024	4.08	3.54	4.87	4.87	4.82	4.88	0.01	23.6	44.4
7 March 2024	4.08	3.51	4.88	4.86	4.81	4.87	0.03	23.6	43.0
7 April 2024	4.09	3.49	4.87	4.87	4.81	4.87	0.03	23.6	43.0
7 May 2024	4.09	3.49	4.88	4.87	4.81	4.88	0.04	23.7	43.0
7 June 2024	4.09	3.49	4.87	4.87	4.81	4.87	0.03	23.6	42.9
7 July 2024	4.09	3.49	4.87	4.87	4.81	4.87	0.02	19.2	43.0
7 August 2024	4.09	3.49	4.88	4.87	4.81	4.88	0.01	22.0	43.0

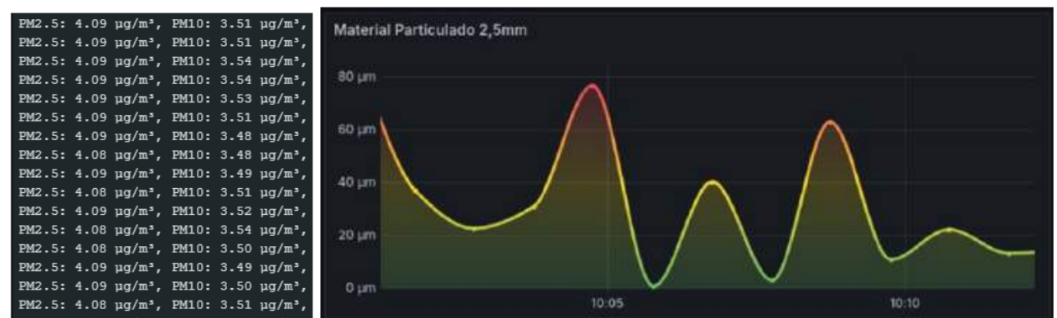


Figure 13. Microparticles of 2.5 µg/m³ and 10 µg/m³.

6. Mesh Video Network for Community Surveillance

Based on the enormous number of surveillance devices already connected to the internet and the great adherence of people to social networks, it is possible to share images and videos from these devices among members of the same social network—with the appropriate authorizations granted by device owners—to expand the scope of the monitored area, as well as to share information on past events.

Social networks, in combination with applications and information made available by IoT, can provide a considerable amount of information, according to the article by Luigi Atzori, Antonio Iera, Giacomo Morabito, and Michele Nitti [21], and they can connect communities to a universe of ubiquitous computing, as described by Antonio M. Ortiz, Dina Hussein, Soochang Park, Son N. Han, Noel Crespi [22] and a combination of the Internet Of Things and Social Networks as explained in the article by Lianhong Ding, Peng Shi, and Bingwu Liu [23]. For the development of this mesh video surveillance community, we propose the hub shown in Figure 14.

Spring Tools 4 is used as an IDE, PostgreSQL 16.2, and Java 11 database. The software was developed using microservice architecture with SpringBoot 3.0. All modules were placed in Docker images to abstract the configuration needs of the machine where the hub was to be installed. Basically, we have two modules as follows:

- WrapperGate—connection to the company’s surveillance and exposure devices and their service interface.
- MemberWatch—membership and device permissions that the manager registered.

WrapperGate must extract and interact with the service interface of a camera connected to an Orange pi i96 (Figure 15). All camera interfaces must be encapsulated by the WrapperGate and this is responsible for abstracting the entire authentication, buffering, and provisioning flow for users who have authorized the extraction of the device’s output information. WrapperGate must export the interface of the device used as a web service standard or REST.

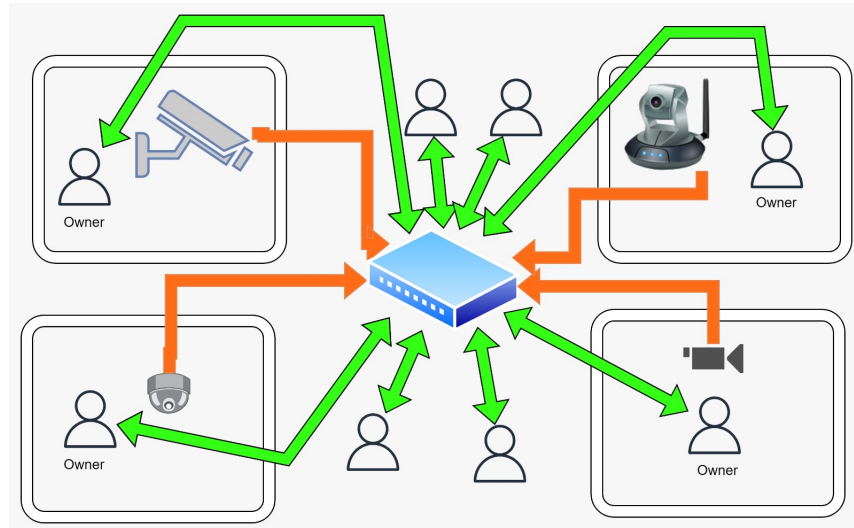


Figure 14. Mesh Community surveillance hub with owners and non-owners (guests).

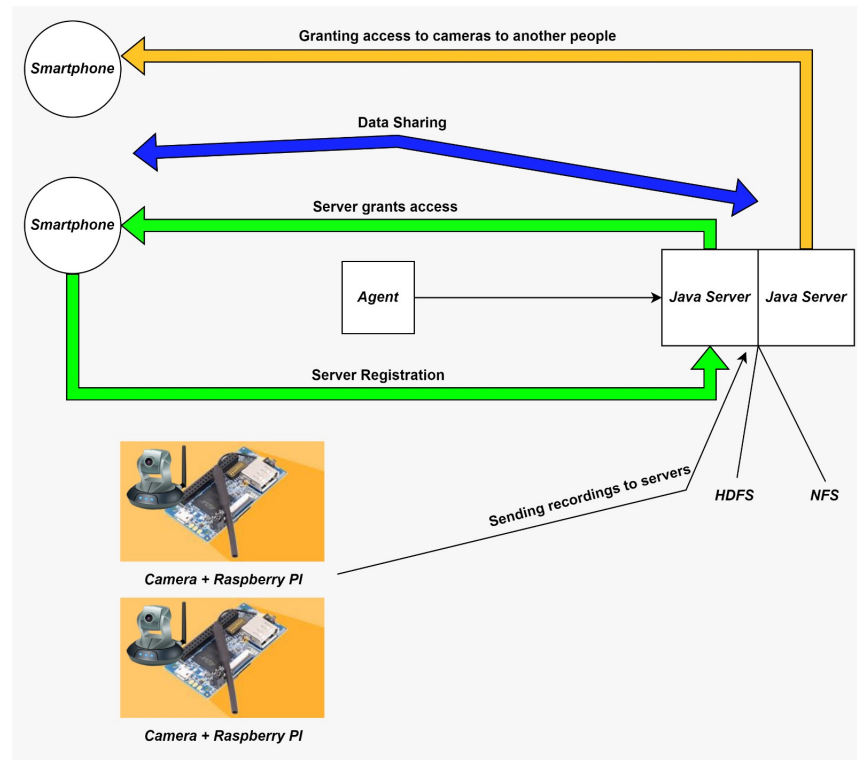


Figure 15. Dataflow architecture of the proposed mesh community surveillance network system.

By sharing information captured by security devices, we can increase safety within our communities by simply allowing community members to get access to these images. So any member granted access can monitor the surroundings of the community and prevent or inhibit threats.

We can extend this coverage to a whole city and allow authorities to join, enabling them to act assertively and preventatively to increase the safety of communities. Also, future image analysis algorithms can identify dangerous situations or threats to the surroundings, receiving as data input the images captured by any device connected to the system.

7. Fleet Management Systems

This application aims to implement real-time data acquisition and analysis in fleet management systems, focusing on distribution centers where forklifts are monitored to

analyze their behavior, allowing the prediction of maintenance needs. This application is listed in this paper because we appreciate the potential future applications of monitoring vehicles used for mail delivery in small cities or communities. For such applications, some improvements are needed to ensure the real-time data availability for users. However, at this initial stage, we are focused on describing how telemetry works, specifically in the acquisition and analysis of operational machine data in real time. The system uses low-cost technologies, such as ESP32 microcontrollers and Raspberry Pi servers, to collect current and voltage data, which are then transmitted via the MQTT protocol to a database and visualized on dashboards, allowing for more efficient and informed management.

7.1. Technologies Applied on the Implementation

This section presents some details of the technologies applied for implementing the telemetry system.

- **ESP32 Microcontroller:** Open-hardware development board based on a 32-bit dual-core processor, 520 KB of flash memory, integrated Wi-Fi, and Bluetooth, facilitating integration with other modules. It is used for monitoring operational machine data, such as current and voltage, and allows communication with local servers.
- **Raspberry Pi 3 B+ Server:** It works as a local server that centralizes the data sent by the ESP32 microcontrollers. It can perform basic pre-processing or filtering of the data before sending them to the main server. It is a low-cost, compact solution ideal for telemetry applications.
- **MQTT Protocol:** A lightweight and efficient communication protocol designed for real-time communication. It is especially suitable for networks with limited or unstable bandwidth, ensuring reliable data transmission between devices.
- **Prometheus Database:** A monitoring and alerting system that stores data in a time-series format. It is ideal for continuous operational data, allowing real-time collection and the querying of metrics.
- **Grafana:** An open source platform used for data visualization and analysis. It allows the creation of interactive and customizable dashboards, making it easy to visualize the collected data in real time via a web browser.
- **Docker Compose:** A tool for defining and running multi-container Docker applications. It simplifies system service configuration and management, allowing all components to run in an integrated manner.
- **Current/Voltage Sensors:** The sensors are fundamental for acquiring the data that feed the telemetry system. The current/voltage sensor was based on a shunt resistor and an INA226 circuit. The Shunt resistor is used to measure the electric current by creating a small voltage drop proportional to the current flowing through it. This approach allows for accurate measurements and is easy to install, contributing to the plug-and-play concept of the system. Current sensor INA226 is a digital current monitor that communicates with the microcontroller via the I2C bus. It is responsible for taking current and voltage readings and transmitting the collected data to the telemetry system.

These sensors were chosen for the accuracy they offer in measurements and for their ease of integration into the developed system.

7.2. Architecture of the Implemented Telemetry System

The architecture of the implemented system is synthesized in Figure 16.

The Sensors represent the forklifts deployed across the distribution center, equipped with ESP32 microcontrollers. These microcontrollers monitor various operational data from forklifts, such as current, voltage, and other critical parameters. Based on these

readings, the system implements control measures using hour meters, which help manage and optimize the equipment maintenance schedule.

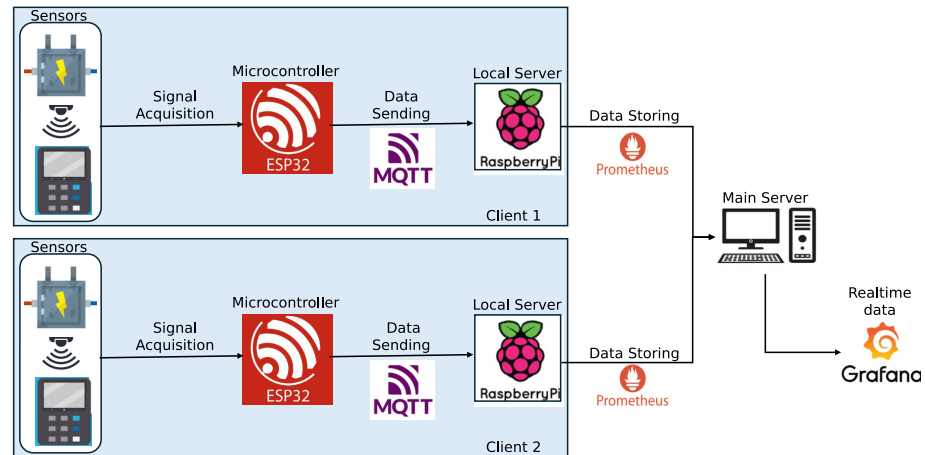


Figure 16. Architecture of the implemented telemetry system.

Local communication involves the data collected by the ESP32 microcontrollers that are transmitted to local servers, comprising Raspberry Pi single board computers. Communication between the microcontrollers and the Raspberry Pi servers is handled via the MQTT protocol. MQTT is a highly efficient solution for real-time communication, particularly suited for networks with limited or unstable bandwidth.

The local servers are implemented using Raspberry Pi. Each local Raspberry Pi server receives and centralizes data from the ESP32 microcontrollers. Additionally, the Raspberry Pi can perform basic pre-processing or data filtering before forwarding the information to the main server.

The main server receives data from all local servers. These data are stored using Prometheus, a robust monitoring and alerting system designed to handle time-series data, making it ideal for continuously monitored operational metrics.

Visualization and monitoring are facilitated via Prometheus, which processes the collected data available for visualization. Grafana, an open source platform, is used to create interactive, customizable dashboards, allowing real-time data visualization and analysis through a web browser.

7.3. Initial Results

The system blocks that constitute the technological framework designed for the project, from the measurement of signals and acquisition of information in the forklifts to the final user dashboard, are represented below in Figure 17.

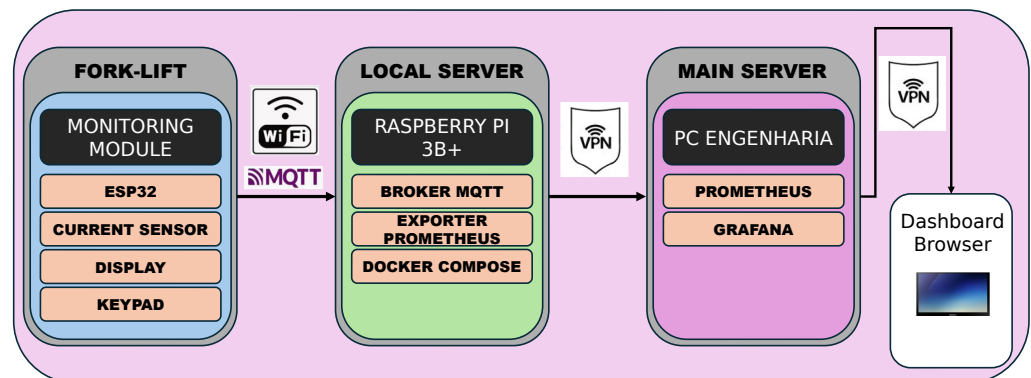


Figure 17. Telemetry system architecture.

The test applied to the system demonstrated the effectiveness of the telemetry system developed for the real-time monitoring of operational data from machines. The main highlights include, the Operator Panel (OP) projected as an interactive panel created to display voltage and current readings, allowing operators to view critical information clearly and accessibly. The display and keyboard setup were configured to use an LCD and a matrix keypad, facilitating user interaction with the system and involving them in data entry. Operation checklists are performed using screens, implemented to assist in managing and monitoring operations, ensuring that procedures are followed correctly. The combination of ESP32 microcontrollers, Raspberry Pi servers, and the Prometheus and Grafana platforms resulted in a low-cost solution with easy integration, meeting the monitoring needs in small environments.

Although the system proved effective, challenges related to Wi-Fi coverage and stability in large warehouses and distribution centers were identified, suggesting the need for improvements for large-scale applications. The results indicate that the system is viable for telemetry applications, with the potential to optimize fleet management and equipment maintenance.

8. Conclusions

The implementations of the five applications briefly described in this paper show the feasibility of using low-cost hardware and the MQTT protocol in IoT systems, enabling real-time data collection and communication in resource-constrained settings. The authors intend to show that the developed prototypes can provide affordable and effective solutions for resource-limited communities to monitor and respond to flood events, air quality issues, community surveillance, and the automation of simple devices at home by monitoring analog and digital sensors as a way to help people with physical needs, fleet management, and equipment maintenance. All those applications aim to improve the quality of life in economically disadvantaged cities or communities.

The study demonstrates the feasibility of using Arduino microcontrollers, sensors, and cloud services to develop low-cost and effective monitoring systems for flood events and air quality issues, as well as for the successful implementation of low-cost IoT-based solutions for smart monitoring and video surveillance, using devices such as ESP32 microcontrollers, Raspberry Pi servers, and sensors.

The limitations for developing technological solutions to improve the quality of life in our communities in the past were primarily related to the cost. Nowadays, these costs have been reduced, and technologies such as Arduino, Raspberry Pi, and ESP32 microcontrollers together with open source software allow people to develop their own solutions for local needs. We hope that such projects can inspire other amateur hardware developers around the world.

Author Contributions: H.P.d.A.: conceptualization; V.A.S.H.: methodology; C.G.P.: validation; J.P.C.: Supervision; M.G.: Project administration. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Data Availability Statement: All data will be made available upon request to the authors.

Acknowledgments: The authors would like to thank the students Breno Soares, Carlos Pacheco, Fernando Nhoqui, Jhony Martins da Silva, and Marcelo de Barros.

Conflicts of Interest: The authors declare no conflicts of interest.

References

1. Mahmood, Y.; Kama, N.; Azmi, A.; Ya'acob, S. An IoT based home automation integrated approach: Impact on society in sustainable development perspective. *Int. J. Adv. Comput. Sci. Appl.* **2020**, *11*, 240–250. [CrossRef]
2. Gubbi, J.; Buyya, R.; Marusic, S.; Palaniswami, M. Internet of Things (IoT): A vision, architectural elements, and future directions. *Future Gener. Comput. Syst.* **2013**, *29*, 1645–1660. [CrossRef]
3. Li, W.; Chai, Y.; Khan, F.; Jan, S.R.U.; Verma, S.; Menon, V.G.; Li, X. A Comprehensive Survey on Machine Learning-Based Big Data Analytics for IoT-Enabled Smart Healthcare System. *Mob. Netw. Appl.* **2021**, *26*, 234–252. [CrossRef]
4. Selvaraj, S.; Sundaravaradhan, S. Challenges and opportunities in IoT healthcare systems: A systematic review. *SN Appl. Sci.* **2020**, *2*, 139. [CrossRef]
5. Syed, A.S.; Sierra-Sosa, D.; Kumar, A.; Elmaghraby, A. Iot in smart cities: A survey of technologies, practices and challenges. *Smart Cities* **2021**, *4*, 429–475. [CrossRef]
6. Apat, H.K.; Nayak, R.; Sahoo, B. A comprehensive review on Internet of Things application placement in Fog computing environment. *Internet Things* **2023**, *23*, 100866. [CrossRef]
7. Vujović, V.; Maksimović, M. Raspberry Pi as a Sensor Web node for home automation. *Comput. Electr. Eng.* **2015**, *44*, 153–171. [CrossRef]
8. Ojo, M.O.; Giordano, S.; Proccisi, G.; Seitanidis, I.N. A Review of Low-End, Middle-End, and High-End Iot Devices. *IEEE Access* **2018**, *6*, 70528–70554. [CrossRef]
9. D'ortona, C.; Tarchi, D.; Raffaelli, C. Open-Source MQTT-Based End-to-End IoT System for Smart City Scenarios. *Future Internet* **2022**, *14*, 57. [CrossRef]
10. Park, S.; Rosca, E.; Agarwal, N. Driving social impact at the bottom of the Pyramid through the internet-of-things enabled frugal innovations. *Technovation* **2022**, *118*, 102381. [CrossRef]
11. Janssen, T.; Koppert, A.; Berkvens, R.; Weyn, M. A Survey on IoT Positioning Leveraging LPWAN, GNSS, and LEO-PNT. *IEEE Internet Things J.* **2023**, *10*, 11135–11159. [CrossRef]
12. Sharma, S. Getting Started with LPWAN: LoRa, Sigfox and NB-IoT. In Proceedings of the Advances in Communication, Devices and Networking, Sikkim, India, 15–16 December 2021; Dhar, S., Do, D.T., Sur, S.N., Liu, H.C.M., Eds.; Springer: Singapore, 2023; pp. 559–568.
13. Yáñez Casas, G.A.; H., J.; Arao-Quiroz, J.; Luna-García, C.; Gutiérrez-Montor, M.; Medina, I.; De-La-Rosa-Rábago, R.; Enciso-Aguilar, M. On the capacities and applications of IoT networks: LoRaWAN, LTEM, MQTT, NB-IoT and Sigfox. In Proceedings of the Conference: XX Congreso Nacional de Ingeniería Electromecánica y de Sistemas (CNIES 2021), Mexico City, Mexico, 11 November 2021.
14. Huang, C.C.; Chien, Y.C.; Zhang, J.C.; Huang, N.F. Reliable and Delay Tolerant Transmission Protocols for LPWAN IoT Sensors. In Proceedings of the 2021 International Conference on Information Networking (ICOIN), Jeju Island, Republic of Korea, 13–16 January 2021; pp. 553–558. [CrossRef]
15. Ramírez-López, F.; Yáñez-Casas, G.A.; López-Balcázar, C.A.; Hernández-Gómez, J.J.; de-la Rosa-Rábago, R.; Couder-Castañeda, C. Development and Coding of a Data Framing Protocol for IoT/LPWAN Networks Based on 8-Bit Processing Architectures. In *Telematics and Computing, Proceedings of the 12th International Congress, WITCOM 2023, Puerto Vallarta, Mexico, 13–17 November 2023*; Mata-Rivera, M.F., Zagal-Flores, R., Barria-Huidobro, C., Eds.; Springer: Cham, Switzerland, 2023; pp. 342–366.
16. Stinson, D. *Cryptography: Theory and Practice*, 3rd ed.; Discrete Mathematics and Its Applications; CRC Press: Boca Raton, FL, USA, 2005.
17. Asvadi, A.; Mitriakov, A.; Lohr, C.; Papadakis, P. Digital Twin Driven Smart Home: A Feasibility Study. In *Participative Urban Health and Healthy Aging in the Age of AI, Proceedings of the 19th International Conference, ICOST 2022 Paris, France, 2–30 June 2022*; Aloulou, H., Abdulrazak, B., de Marassé-Enouf, A., Mokhtari, M., Eds.; Springer: Cham, Switzerland, 2022; pp. 18–29.
18. Ramadan, Z.; Farah, M.; El Essrawi, L. From Amazon.com to Amazon.love: How Alexa is redefining companionship and interdependence for people with special needs. *Psychol. Mark.* **2021**, *38*, 596–609. [CrossRef]
19. Statcounter GlobalStats. Mobile Operating System Market Share Worldwide. 2024. Available online: <https://gs.statcounter.com/os-market-share/mobile/worldwide> (accessed on 7 January 2025).
20. Wexler, S.; Shaffer, J.; Cotgreave, A. *The Big Book of Dashboards: Visualizing Your Data Using Real-World Business Scenarios*; John Wiley & Sons: Hoboken, NJ, USA, 2017.
21. Atzori, L.; Iera, A.; Morabito, G.; Nitti, M. The Social Internet of Things (SIoT)—When social networks meet the Internet of Things: Concept, architecture and network characterization. *Comput. Netw.* **2012**, *56*, 3594–3608. [CrossRef]

22. Ortiz, A.M.; Hussein, D.; Park, S.; Han, S.N.; Crespi, N. The Cluster Between Internet of Things and Social Networks: Review and Research Challenges. *IEEE Internet Things J.* **2014**, *1*, 206–215. [[CrossRef](#)]
23. Ding, L.; Shi, P.; Liu, B. The clustering of Internet, Internet of Things and social network. In Proceedings of the 2010 Third International Symposium on Knowledge Acquisition and Modeling, Wuhan, China, 20–21 October 2010; pp. 417–420. [[CrossRef](#)]

Disclaimer/Publisher’s Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.