

# Influence of Particle Size in the Characterization of Street Dust by Proximal Soil Sensing <sup>†</sup>

Ricardo Urrutia-Goyes <sup>1,2</sup>, Netzahualpille Hernandez <sup>2</sup>, Enrique Ortiz-Nadal <sup>3</sup>, Olivia Carrillo <sup>3</sup> and Nancy Ornelas-Soto <sup>2,\*</sup>

<sup>1</sup> Departamento de Ciencias de la Energía y Mecánica, Universidad de las Fuerzas Armadas ESPE, Av. Gral. Rumiñahui s/n, P.O. Box 171-5-231B, Sangolquí 171103, Ecuador; erurutia@espe.edu.ec

<sup>2</sup> Laboratorio de Nanotecnología Ambiental, Tecnológico de Monterrey, Escuela de Ingeniería y Ciencias, Ave. Eugenio Garza Sada 2501, Monterrey 64849, México; netzahualpille@itesm.mx

<sup>3</sup> Tecnológico de Monterrey, Escuela de Ingeniería y Ciencias, Ave. Eugenio Garza Sada 2501, Monterrey 64849, México; eortiz@itesm.mx (E.O.-N.); ocarrillo@itesm.mx (O.C.)

\* Correspondence: ornel@itesm.mx; Tel.: +52-81-8358-2000 (ext. 5561)

<sup>†</sup> Presented at the 4th International Electronic Conference on Sensors and Applications, 15–30 November 2017; Available online: <https://sciforum.net/conference/ecsa-4>.

Published: 14 November 2017

**Abstract:** Urban road dust can be enriched in different elements and hence it can pose a threat to human and environmental health. Proximal soil sensing allows the swift monitoring of such particles in order to draw attention to any possible risks. The goal of this study is to find the variation in concentrations found when using a portable X-ray fluorescence (XRF) proximal sensor for the determination of metals in road dust with different degrees of sample pretreatment. In general, although results are element dependent, sieving samples to a particle size of <250 µm is recommended. This study can help field workers to define an expected accuracy when using sensors in street dust analysis.

**Keywords:** street dust; XRF; proximal soil sensor; soil; characterization; particle size; pretreatment

## 1. Introduction

Environmental analyses can be carried out by using different types of sensors and methodologies. Diverse variables such as molecule identification, carbon monoxide detection, or compounds speciation can be studied by using biosensors, chemical, or physical sensors [1–3]. A particular type of instrument that can be placed within two meters of a soil sample is called proximal soil sensor. These kind of devices are considered effective since many readings can be taken in the field [4,5].

A specific type of proximal soil sensor, portable X-ray fluorescence (XRF) devices, use a spectrometric technique that measure, compare and contrast the energy emitted by the elements in the sample after excitation by a source of X-rays in order to quantify the relative concentrations of the elements [4,6,7]. Portable XRF devices have been used in the analysis of soil, sediments and road dust, either as the main analytical technique or as part of a compound method [8–11].

Determining contamination or human health risk in a specific area can be done by identifying contaminants in street dust [12]. Road dust is a collection of particles from both natural and anthropogenic sources that settle down on the streets and sidewalks. Such particles can become resuspended by the wind and traffic conditions, and reach humans in the vicinity [13,14].

This work describes the influence of particle size in the characterization of street dust by proximal soil sensing. Contrasting the results of a homogenized sample with those of a sieved sample (<250 µm) allows to exemplify the importance of applying pretreatment to street dust when analyzing metals.

## 2. Methods


A total of 44 road dust samples were collected from streets in Monterrey, Mexico from a mix of commercial areas, residential streets and roads with different traffic volumes. Sampling was carried out in August 2017 during a period without any rain for at least seven days. Plastic brushes and pan were used to collect the samples from an area of one squared meter. Any vegetation and gravel was removed before analysis. Plastic bags were used to store the samples at room temperature.

Each sample was kept in its plastic bag and homogenized (i.e., mixed by stirring and rotating the bag thoroughly) before the first measuring process. For the second measuring process, each sample was placed into a  $<250\ \mu\text{m}$  sieve and the resulting portion was similarly homogenized and measured. Metals were determined by using a portable XRF device (Olympus 6000 Delta Premium) placing the sensor on top of the plastic bag for both kind of samples in order to simulate field work conditions. Count time for each reading was 90 s in regular soil mode. To test the reliability of the XRF device, blank samples and certified reference material (CRMs) obtained from NIST® (2710a and 2711a) were measured repeatedly. RSDs calculated showed ranges between 1–10% for all the studied elements. Mean recoveries calculated ranged between 110–135%.

Additionally, regressions analysis between the data obtained from both kind of samples was carried out to test the influence of sieving the samples to a particle size of  $<250\ \mu\text{m}$ . Statistical analysis was performed by using XLSTAT software (Addinsoft, Paris, France 2017).

## 3. Results and Discussion

Even though the 44 road dust samples were collected from similar areas, the available amount of dust ranged from 147 to 643 gr with a mean of 366 gr (see Figure 1) denoting that locations have different characteristics due to different traffic and wind conditions. The quantities that correspond to the fine portion of the sample ( $<250\ \mu\text{m}$ ) ranged from 35 to 95% with a mean of 65% indicating that the general composition of the samples varies greatly in relation to particle size.

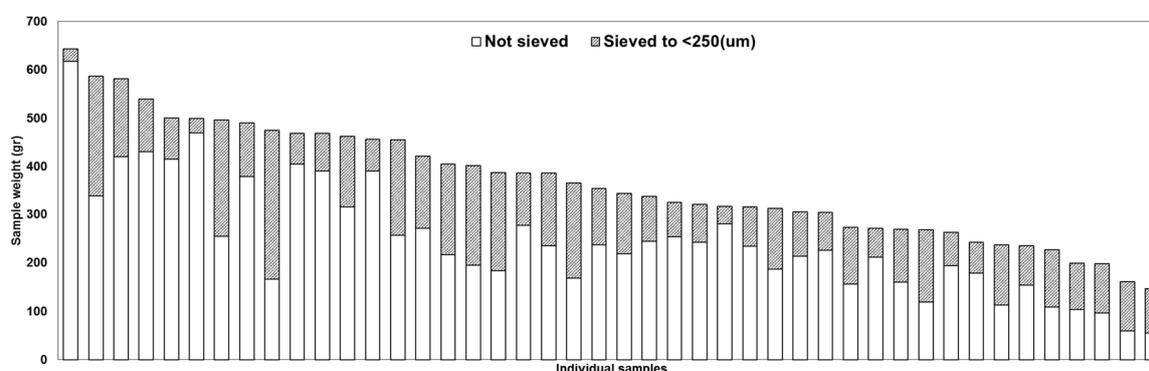


**Figure 1.** Weight of samples distribution from largest to smallest. Two portions can be seen: The first after homogenization, and the second after sieving to  $<250\ \mu\text{m}$ .

Homogenized samples without any sieving showed the following statistics: Rb ranged from 4.2 to 39.6 ppm with a mean of 19.7 ppm; Zr ranged from 33.0 to 334.0 ppm with a mean of 138.6 ppm; Zn ranged from 109.0 to 1180.0 ppm with a mean of 642.3 ppm; Ti ranged from 325.0 to 2710.0 ppm with a mean of 1237.8 ppm; Hg ranged from 4.9 to 15.0 ppm with a mean of 7.7 ppm; Sr ranged from 235.0 to 1586 ppm with a mean of 436.6 ppm; Mn ranged from 151.0 to 957.0 ppm with a mean of 355.3 ppm; K ranged from 4704.0 to 11,984.0 ppm with a mean of 8638.7 ppm; Ni ranged from 26.0 to 110.0 ppm with a mean of 52.4 ppm; Ba ranged from 101.0 to 652.0 ppm with a mean of 248.4 ppm; Cr ranged from 30.0 to 545.0 ppm with a mean of 103.2 ppm; and Pb ranged from 10.2 to 712.0 ppm with a mean of 242.1 ppm. On the other hand, samples that were sieved to  $<250\ \mu\text{m}$  and homogenized showed the following statistics: Rb ranged from 7.8 to 34.1 ppm with a mean of 22.5 ppm; Zr ranged from 71.5 to 310.5 ppm with a mean of 173.4 ppm; Zn ranged from 103.5 to 1134.5 ppm with a mean of 584.1 ppm; Ti ranged from 478.5 to 3674.0 ppm with a mean of 7992.7 ppm; Hg ranged from 4.8 to

16.3 ppm with a mean of 8.1 ppm; Sr ranged from 255.0 to 1856.5 ppm with a mean of 442.3 ppm; Mn ranged from 188.0 to 1226.0 ppm with a mean of 366.9 ppm; K ranged from 3738.0 to 10,983.0 ppm with a mean of 7992.7 ppm; Ni ranged from 30.0 to 126.0 ppm with a mean of 49.1 ppm; Ba ranged from 142.5 to 400.5 ppm with a mean of 248.5 ppm; Cr ranged from 34.5 to 225.5 ppm with a mean of 91.5 ppm; and Pb ranged from 35.8 to 388.5 ppm with a mean of 201.8 ppm.

Regressions between the two measurements obtained by metal can be seen in Figure 2. It can be noted that a systematic underestimation generally happens on measurements taken on homogenized samples without any sieving. Namely, Pb shows a slope smaller than 0.80; Cr, Ba, and Ni show a slope from 0.80 to 0.90; K, Mn, Sr, and Hg show a slope from 0.9 to 1.00; and Ti, Zn, Zr, and Rb show a slope greater than 1.00. Additionally, the coefficient of determination is greater than 0.8 for Cr and Sr; greater than 0.60 for Pb, K, Ti, Zn, Zr, Rb; and smaller for Ba, Ni, Mn, Hg. The linearity and correlation between measurements are element dependent and hence any analysis should be carried out independently. It can be suggested that correction methodologies could adjust the accuracy for measurements with underestimation.

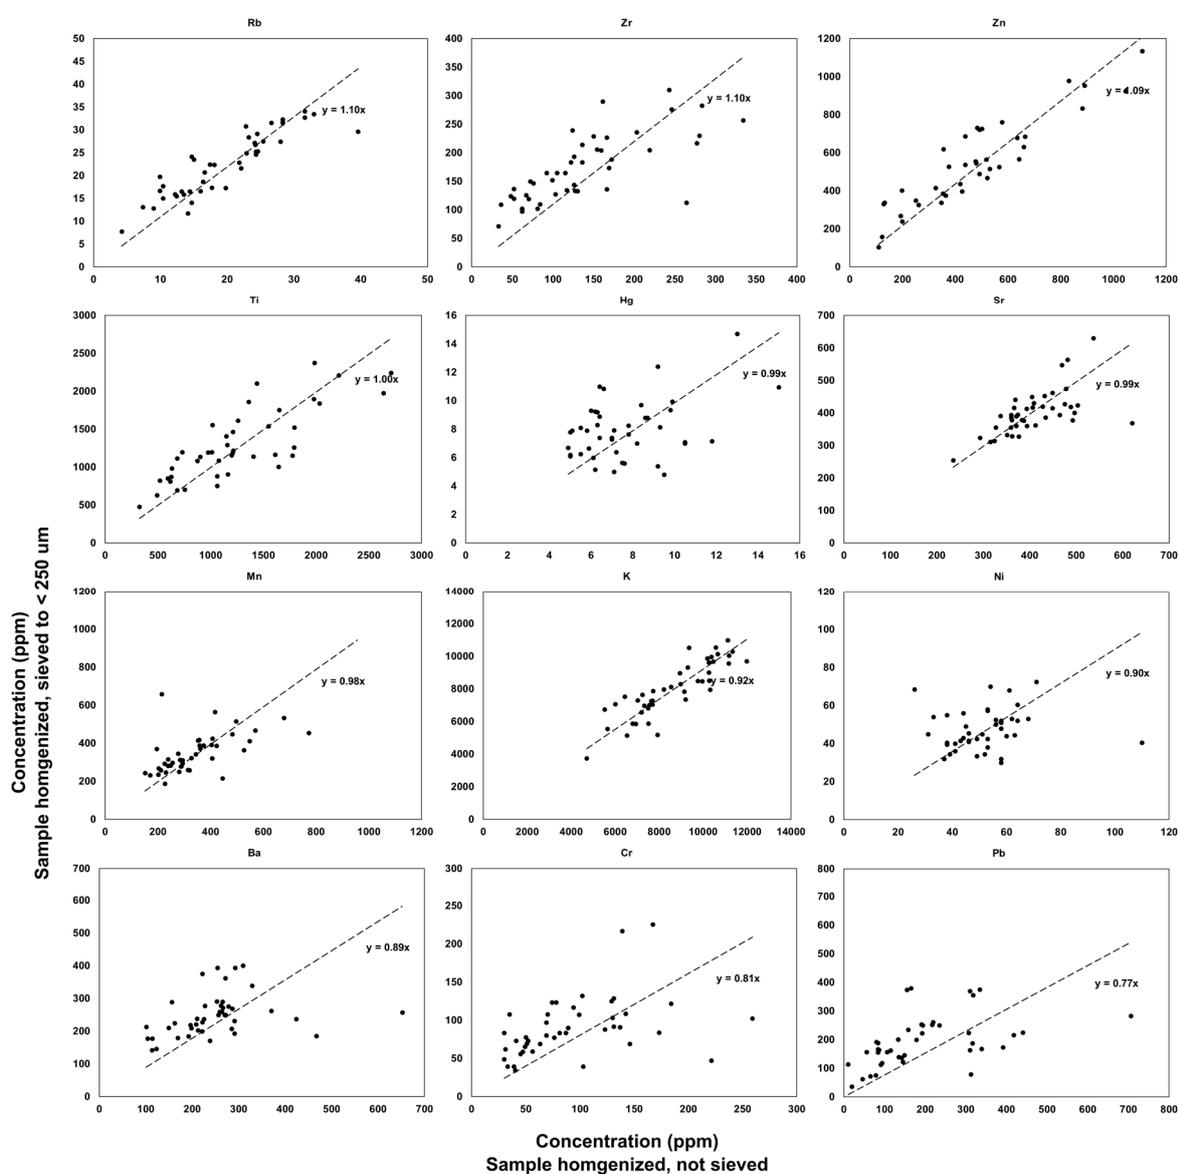

**Figure 2.** Regressions of portable XRF measurements on samples sieved to <250 μm against measurements on samples homogenized only. Dashed black line represents linear trend. Elements sorted by slope in descendent order.

#### 4. Conclusions

Road dust samples have been collected and analyzed for metals by using XRF. Great variability has been found both in the available amount of dust per area and in the proportional composition of fine portions. Wind and traffic conditions are suggested as the main cause for such behavior. Regression analysis for measurements taken on samples homogenized without any sieving and samples sieved to <250 µm with additional homogenization has led to the conclusion that sample pretreatment improves the results obtained when analyzing metals in street dust.

**Acknowledgments:** The authors wish to gratefully acknowledge the collaboration in the project of Mucio Rodriguez with Tecnologico de Monterrey.

**Author Contributions:** Ricardo Urrutia-Goyes and Nancy Ornelas-Soto conceived and designed the experiments; Ricardo Urrutia-Goyes and Netzahualpille Hernandez performed the experiments; Ricardo Urrutia-Goyes and Nancy Ornelas-Soto analyzed the data; Nancy Ornelas-Soto contributed reagents/materials/analysis tools; Ricardo Urrutia-Goyes wrote the paper; and Enrique Ortiz-Nadal, Olivia Carrillo and Nancy Ornelas-Soto provided critical revisions of the manuscript.

**Conflicts of Interest:** The authors declare no conflict of interest.

#### References

1. Biyani, M.; Biyani, R.; Tsuchihashi, T.; Takamura, Y.; Ushijima, H.; Tamiya, E.; Biyani, M. DEP-On-Go for Simultaneous Sensing of Multiple Heavy Metals Pollutants in Environmental Samples. *Sensors* **2017**, *17*, 45.
2. Piikki, K.; Söderström, M.; Eriksson, J.; Muturi John, J.; Ileri Muthee, P.; Wetterlind, J.; Lund, E. Performance Evaluation of Proximal Sensors for Soil Assessment in Smallholder Farms in Embu County, Kenya. *Sensors* **2016**, *16*, 1950.
3. Bogena, H.R.; Huisman, J.A.; Schilling, B.; Weuthen, A.; Vereecken, H. Effective Calibration of Low-Cost Soil Water Content Sensors. *Sensors* **2017**, *17*, 208.
4. Sparks, D.L. *Advances in Agronomy*; Advances in Agronomy Series; Academic Press: Cambridge, MA, USA, 2011.
5. Suh, J.; Lee, H.; Choi, Y. A Rapid, Accurate, and Efficient Method to Map Heavy Metal-Contaminated Soils of Abandoned Mine Sites Using Converted Portable XRF Data and GIS. *Int. J. Environ. Res. Public Health* **2016**, *13*, 1191.
6. Weindorf, D.C.; Bakr, N.; Zhu, Y. Chapter One—Advances in Portable X-ray Fluorescence (PXRF) for Environmental, Pedological, and Agronomic Applications. In *Advances in Agronomy*; Sparks, D.L., Ed.; Academic Press: Cambridge, MA, USA, 2014; Volume 128, pp. 1–45.
7. Paulette, L.; Man, T.; Weindorf, D.C.; Person, T. Rapid assessment of soil and contaminant variability via portable x-ray fluorescence spectroscopy: Copşa Mică, Romania. *Geoderma* **2015**, *243–244*, 130–140.
8. Lee, H.; Choi, Y.; Suh, J.; Lee, S.-H. Mapping Copper and Lead Concentrations at Abandoned Mine Areas Using Element Analysis Data from ICP–AES and Portable XRF Instruments: A Comparative Study. *Int. J. Environ. Res. Public Health* **2016**, *13*, 384.
9. Urrutia-Goyes, R.; Argyraki, A.; Ornelas-Soto, N. Assessing lead, nickel, and zinc pollution in topsoil from a historic shooting range rehabilitated into a public urban park. *Int. J. Environ. Res. Public Health* **2017**, *14*, 698.
10. Urrutia-Goyes, R.; Mahlknecht, J.; Argyraki, A.; Ornelas-Soto, N. Trace element soil contamination at a former shooting range in Athens, Greece. *Geoderma Reg.* **2017**, *10*, 191–199.
11. Sun, G.; Li, Z.; Liu, T.; Chen, J.; Wu, T.; Feng, X. Metal Exposure and Associated Health Risk to Human Beings by Street Dust in a Heavily Industrialized City of Hunan Province, Central China. *Int. J. Environ. Res. Public Health* **2017**, *14*, 261.
12. Kim, J.A.; Park, J.H.; Hwang, W.J. Heavy Metal Distribution in Street Dust from Traditional Markets and the Human Health Implications. *Int. J. Environ. Res. Public Health* **2016**, *13*, 820.

13. Apeageyi, E.; Bank, M.S.; Spengler, J.D. Distribution of heavy metals in road dust along an urban-rural gradient in Massachusetts. *Atmos. Environ.* **2011**, *45*, 2310–2323.
14. Bourliva, A.; Christophoridis, C.; Papadopoulou, L.; Giouri, K.; Papadopoulos, A.; Mitsika, E.; Fytianos, K. Characterization, heavy metal content and health risk assessment of urban road dusts from the historic center of the city of Thessaloniki, Greece. *Environ. Geochem. Health* **2017**, *39*, 611–634.



© 2018 by the authors; Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).