


Supporting Material

Conductive nanofilms with oppositely charged reduced graphene oxides as a base for electroactive coatings and sensors

Tomasz Kruk, Piotr Warszyński

A)

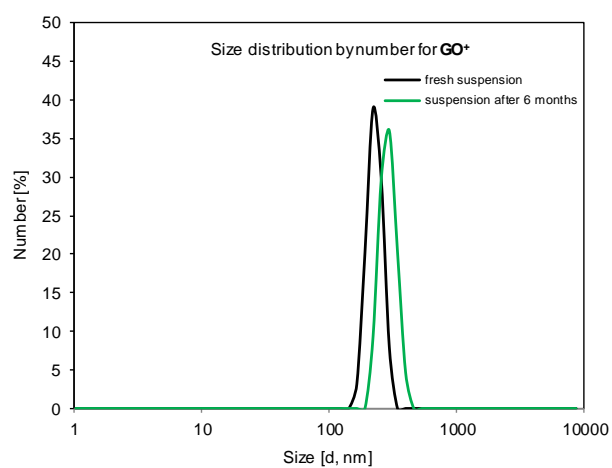

B)

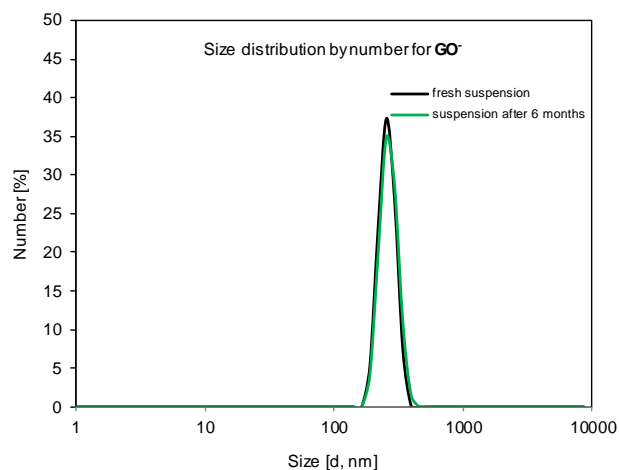


Figure S1. Size distribution measured by DLS for suspensions of GO^+ - (A) and GO^- - (B), freshly prepared and after 6 months of storage.